



Digital output module XI/ON, 120/230VAC, 2DO, 0.5A

Part no. XN-2DO-120/230VAC-0.5A
Catalog No. 140150

EL-Nummer (Norway) 0004560837

Delivery program

| | | | |
|-------------------|--|--|--|
| Function | | | XI/ON I/O modules |
| Function | | | XN Slice module |
| Short Description | | | 2 Digital output, 120/230 V AC/0.5 A |
| For use with | | | XN-S3T-SBC XN-S3S-SBC XN-S4T-SBCS XN-S4S-SBCS |

Technical data

General

| | | | |
|---|--|-----|---|
| Standards | | | EN 61000-6-2 EN 61000-6-4 EN 61131-2 |
| Potential isolation | | | Yes, through optocoupler |
| Ambient temperature | | | |
| Ambient temperature, operation | | °C | 0 - +55 |
| Storage, transport | 9 | °C | -25 - +85 |
| Relative humidity | | | |
| Relative humidity | | | 5 - 95 % (indoor), Level RH-2, no condensation (for storage at 45°C) |
| Ambient conditions, mechanical | | | |
| Degree of Protection | | | IP20 |
| Harmful gases | | ppm | SO ₂ : 10 (rel. humidity < 75%, no condensation) H ₂ S: 1.0 (rel. humidity < 75 %,no condensation) |
| Vibration resistance, operating conditions | | | according to IEC/EN 60068-2-6 |
| Mechanical shock resistance | | g | according to IEC 60068-2-27 |
| Continuous shock resistance (IEC/EN 60068-2-29) | | | According to IEC 60068-2-29 |
| Drop and topple | | | According to IEC 60068-2-31, free fall according to IEC 60068-2-32 |
| Electromagnetic compatibility (EMC) | | | |
| ESD | Air/contact discharge | kV | EN 61000-4-2 |
| Electromagnetic fields | (0.08...1) / (1,4...2) / (2...2,7) GHz | V/m | EN 61100-4-2 |
| Burst | | | EN 61100-4-4 |
| Surge | | | EN 61100-4-5 |
| Radiated RFI | | V | EN 61100-4-6 |
| Emitted interference (radiated, high frequency) | (30...230 MHz) / (230...1000 MHz) | dB | EN 55016-2-3 |
| Voltage fluctuations/voltage dips | | | EN 61131-2 |
| Type test | | | to EN 61131-2 |
| Approvals | | | CE, cULus |
| Other technical data (sheet catalogue) | | | Technical Data |

Analog input modules

| | | |
|----------|--------|---|
| Channels | Number | 2 |
|----------|--------|---|

| | | | |
|---|-----------------|----|--|
| Rated voltage through supply terminal | U _L | | 120/230 V AC (45 - 65 Hz) |
| Rated current consumption from module bus | I _{MB} | mA | ≤ 35 |
| Connectable sensors | | | Resistive loads Inductive loads Lamp loads |
| Diagnostics | | | No |

Analog output modules

| | | | |
|---|-----------------|--------|---------------------------|
| Channels | | Number | 2 |
| Rated voltage through supply terminal | U _L | | 120/230 V AC (45 - 65 Hz) |
| Rated current consumption from module bus | I _{MB} | mA | ≤ 35 |

Digital outputs

| | | | |
|---|--------------------------------|--------|--|
| Channels | | Number | 2 |
| Rated voltage through supply terminal | U _L | | 120/230 V AC (45 - 65 Hz) |
| Rated current consumption from module bus | I _{MB} | mA | ≤ 35 |
| Power loss | P | W | Normally 1 |
| Output voltage | | | |
| High level | U _H /U _A | | > U _L - 2 V DC (zero-point switching triac) |
| Output current | | A | |
| High level (rated value) | I _H | | 0.5 A |
| High level (permissible range) | I _H | A | 0.02 - 0.5 |
| Low signal | I _A | mA | < 1.5 |
| Back-up fuse | | | 500 mA FF |
| Surge current | I _S | A | 8 (1 period at 60 Hz) |
| Module total current | | A | 1 |
| Delay on signal change and resistive load | | | |
| from Low to High level | | μs | T/2 +1 ms |
| From High to Low signal | | μs | T/2 +1 ms |
| Load resistance range | | | at 120 V AC 240 Ω - 6 kΩ at 230 V AC 460 Ω - 11.5 kΩ |
| Utilization factor | % | g | 100 (observe derating) |
| Can be connected | | | Resistive loads Inductive loads Lamp loads |
| Diagnostics | | | No |
| Base modules | | | |
| with C connection | | | 2-wire/3-wire XN-S3x-SBC 4-wire XN-S4x-SBCS |

Digital inputs

| | | | |
|---|-----------------|--------|--|
| Channels | | Number | 2 |
| Rated voltage through supply terminal | U _L | | 120/230 V AC (45 - 65 Hz) |
| Rated current consumption from module bus | I _{MB} | mA | ≤ 35 |
| Input voltage | | | |
| High level | U _{eH} | V | > U _L (-2 V) |
| Base modules | | | |
| with C connection | | | 2-wire/3-wire XN-S3x-SBC 4-wire XN-S4x-SBCS |

Relay modules

| | | | |
|---|-----------------|----|--|
| Rated voltage through supply terminal | U _L | | 120/230 V AC (45 - 65 Hz) |
| Rated current consumption from module bus | I _{MB} | mA | ≤ 35 |
| Power loss | P | W | Normally 1 |
| Can be connected | | | Resistive loads Inductive loads Lamp loads |
| Utilization factor | g | % | 100 |
| Base modules | | | |
| with C connection | | | 2-wire/3-wire |

| | | | |
|---|-----------------|--------|--|
| | | | XN-S3x-SBC 4-wire XN-S4x-SBCS |
| Power supply module | | | |
| Rated voltage through supply terminal | U _L | | 120/230 V AC (45 - 65 Hz) |
| Rated current consumption from module bus | I _{MB} | mA | ≤ 35 |
| Power loss | P | W | 1 |
| Counter module | | | |
| Channels | | Number | 2 |
| Rated voltage through supply terminal | U _L | | 120/230 V AC (45 - 65 Hz) |
| Rated current consumption from module bus | I _{MB} | mA | ≤ 35 |
| Digital inputs | | | |
| Input voltage | | | |
| High level | U _{oH} | V | > U _L (-2 V) |
| Digital outputs | | | |
| Output current | | A | |
| High level (permissible range) | I _H | A | 0.02 - 0.5 |
| High level (rated value) | I _H | | 0.5 A |
| Interfaces | | | |
| Rated voltage through supply terminal | U _L | | 120/230 V AC (45 - 65 Hz) |
| Rated current consumption from module bus | I _{MB} | mA | ≤ 35 |
| Power loss | P | W | Normally 1 |
| Notes | | | |
| The supply terminal (U _L) provides power for the module electronics and for the consumers at the outputs. The total current required for each module consists of the sum of all partial currents. | | | |
| Part of the XI/ON module's electronics is supplied with module bus voltage (5 V DC), the other part through the supply terminal (U _L). | | | |
| To increase the maximum output current to up to 1 A, two outputs can be connected in parallel. | | | |
| Note for table header | | | The rated current from supply terminal data apply at zero load current. Applies for resistive load: RLO < 1kΩ |

Design verification as per IEC/EN 61439

| | | | |
|--|-------------------|----|--|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I _n | A | 0 |
| Heat dissipation per pole, current-dependent | P _{vid} | W | 0 |
| Equipment heat dissipation, current-dependent | P _{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P _{vs} | W | 1 |
| Heat dissipation capacity | P _{diss} | W | 0 |
| Operating ambient temperature min. | | °C | 0 |
| Operating ambient temperature max. | | °C | 55 |
| Degree of Protection | | | IP20 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Meets the product standard's requirements. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |

| | | | |
|--|--|--|--|
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | Is the panel builder's responsibility. |
| 10.12 Electromagnetic compatibility | | | Is the panel builder's responsibility. |
| 10.13 Mechanical function | | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Technical data ETIM 7.0


| | | | |
|---|----|--|-----------|
| PLC's (EG000024) / Fieldbus, decentr. periphery - digital I/O module (EC001599) | | | |
| Electric engineering, automation, process control engineering / Control / Field bus, decentralized peripheral / Field bus, decentralized peripheral - digital I/O module (ecl@ss10.0.1-27-24-26-04 [BAA055014]) | | | |
| Supply voltage AC 50 Hz | V | | 102 - 253 |
| Supply voltage AC 60 Hz | V | | 102 - 253 |
| Supply voltage DC | V | | 0 - 0 |
| Voltage type of supply voltage | | | AC |
| Number of digital inputs | | | 0 |
| Number of digital outputs | | | 2 |
| Digital inputs configurable | | | No |
| Digital outputs configurable | | | No |
| Input current at signal 1 | mA | | 0 |
| Permitted voltage at input | V | | 0 - 0 |
| Type of voltage (input voltage) | | | AC |
| Type of digital output | | | Triac |
| Output current | A | | 0.5 |
| Permitted voltage at output | V | | 0 - 251 |
| Type of output voltage | | | AC |
| Short-circuit protection, outputs available | | | No |
| Number of HW-interfaces industrial Ethernet | | | 0 |
| Number of interfaces PROFINET | | | 0 |
| Number of HW-interfaces RS-232 | | | 0 |
| Number of HW-interfaces RS-422 | | | 0 |
| Number of HW-interfaces RS-485 | | | 0 |
| Number of HW-interfaces serial TTY | | | 0 |
| Number of HW-interfaces parallel | | | 0 |
| Number of HW-interfaces Wireless | | | 0 |
| Number of HW-interfaces USB | | | 0 |
| Number of HW-interfaces other | | | 1 |
| With optical interface | | | No |
| Supporting protocol for TCP/IP | | | No |
| Supporting protocol for PROFIBUS | | | Yes |
| Supporting protocol for CAN | | | Yes |
| Supporting protocol for INTERBUS | | | No |
| Supporting protocol for ASI | | | No |
| Supporting protocol for KNX | | | No |
| Supporting protocol for MODBUS | | | No |
| Supporting protocol for Data-Highway | | | No |
| Supporting protocol for DeviceNet | | | Yes |
| Supporting protocol for SUCONET | | | No |
| Supporting protocol for LON | | | No |
| Supporting protocol for PROFINET IO | | | No |
| Supporting protocol for PROFINET CBA | | | No |

| | | |
|--|----|--------------------|
| Supporting protocol for SERCOS | | No |
| Supporting protocol for Foundation Fieldbus | | No |
| Supporting protocol for EtherNet/IP | | No |
| Supporting protocol for AS-Interface Safety at Work | | No |
| Supporting protocol for DeviceNet Safety | | No |
| Supporting protocol for INTERBUS-Safety | | No |
| Supporting protocol for PROFIsafe | | No |
| Supporting protocol for SafetyBUS p | | No |
| Supporting protocol for other bus systems | | Yes |
| Radio standard Bluetooth | | No |
| Radio standard WLAN 802.11 | | No |
| Radio standard GPRS | | No |
| Radio standard GSM | | No |
| Radio standard UMTS | | No |
| IO link master | | No |
| System accessory | | Yes |
| Degree of protection (IP) | | IP20 |
| Type of electric connection | | Plug-in connection |
| Time delay at signal exchange | ms | 0 - 11 |
| Fieldbus connection over separate bus coupler possible | | Yes |
| Rail mounting possible | | Yes |
| Wall mounting/direct mounting | | No |
| Front build in possible | | No |
| Rack-assembly possible | | No |
| Suitable for safety functions | | No |
| Category according to EN 954-1 | | None |
| SIL according to IEC 61508 | | None |
| Performance level acc. EN ISO 13849-1 | | None |
| Appendant operation agent (Ex ia) | | No |
| Appendant operation agent (Ex ib) | | No |
| Explosion safety category for gas | | None |
| Explosion safety category for dust | | None |
| Width | mm | 12.6 |
| Height | mm | 74.1 |
| Depth | mm | 55.4 |

Approvals

| | |
|--------------------------------------|--|
| Product Standards | UL 508; CSA-C22.2 No. 142; IEC/EN 6113-2; CE marking |
| UL File No. | E205091 |
| UL Category Control No. | NRAQ, NRAQ7 |
| CSA File No. | UL report applies to both US and Canada |
| CSA Class No. | 2252-01, 2252-81 |
| North America Certification | UL recognized, certified by UL for use in Canada |
| Specially designed for North America | No |
| Current Limiting Circuit-Breaker | No |
| Degree of Protection | IEC: IP20, UL/CSA Type: - |

Dimensions

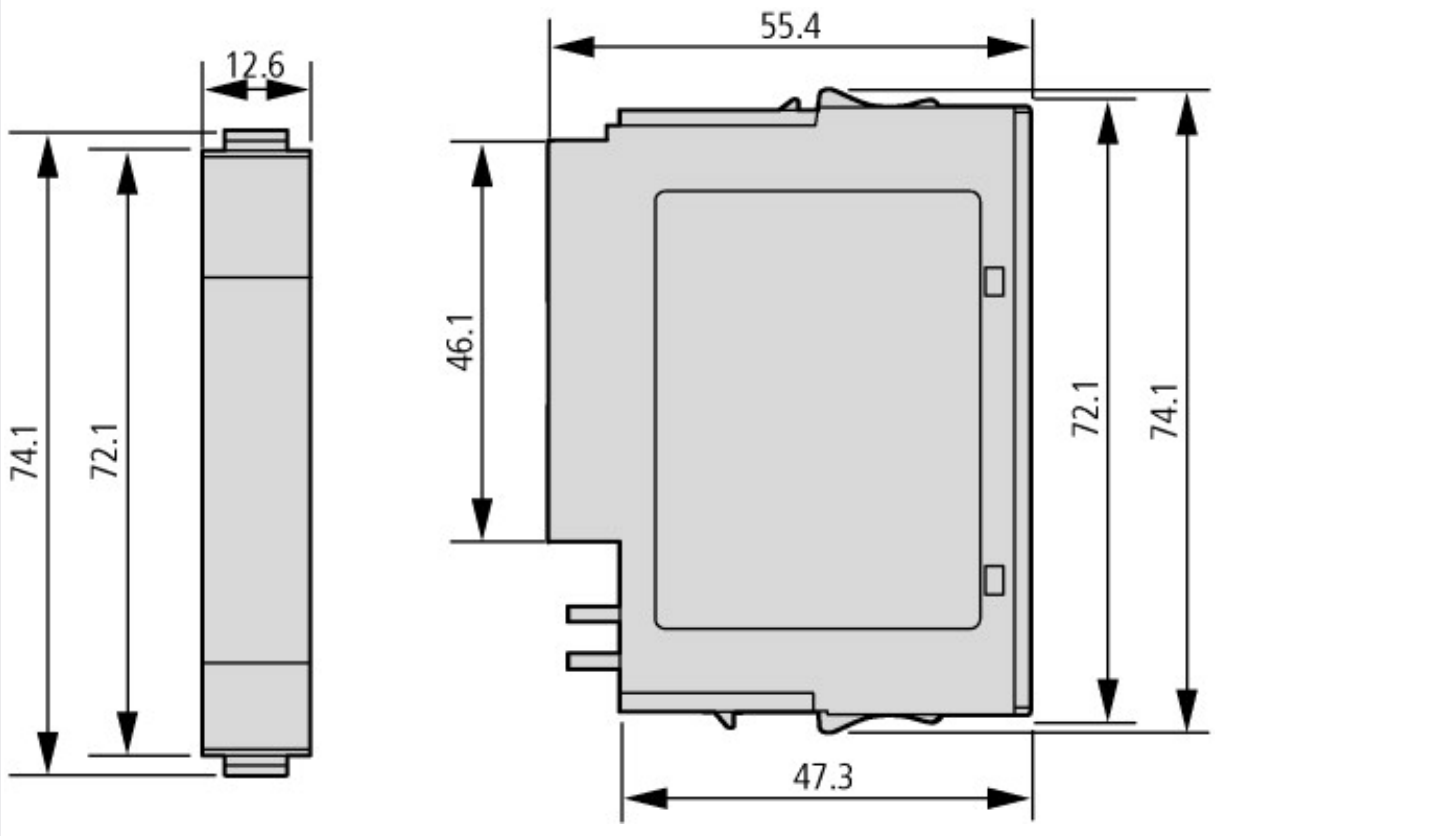

Dimensions

Additional product information (links)

| | |
|--|---|
| Manual Digital XI/ON modules, power supply module MN05002010Z | |
| Benutzerhandbuch XI/ON-Module, Stromversorgungsmodul MN05002010Z - Deutsch | https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN05002010Z_DE.pdf |
| Manual Digital XI/ON modules, power supply module MN05002010Z - English | https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN05002010Z_EN.pdf |
| Technical Data | http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=14.111 |