DATASHEET - MSC-D-1-M7(24VDC)/BBA



DOL starter, 380 V 400 V 415 V: 0.25 kW, Ir= 0.63 - 1 A, 24 V DC, DC voltage

FATON

Powering Business Worldwide

Part no. MSC-D-1-M7(24VDC)/BBA

Catalog No. 102967

Alternate Catalog XTSC001B007BTDNL-A

No

EL-Nummer (Norway)

4315428

De	livery	prog	ram
	-		

Notes Notes Notes Notes Noter atings Motor ratings Motor varing AC-3 380 V 400 V 415 V Rett doperational current AC-3 380 V 400 V 415 V In A 0.8 Retted short-circuit current 380 - 415 V Setting range of overload releases Coordination Souther sequence Type of coordination '2' Type of co	Delivery program			
Notes Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging. no Motor ratings Meter rating AC-3 380 V 400 V 415 V Rated operational current AC-3 380 V 400 V 415 V Rated short-circuit current 380 - 415 V Rated short-cir	Basic function			DOL starters (complete devices)
Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging. Motor ratings Motor rating Motor rating Motor rating AC3 380 V 400 V 415 V Rested operational current AC3 380 V 400 V 415 V In I	Basic device			MSC
Connection to SmartWine-DT Motor ratings Motor rating AC-3 380V 400 V 15 V P NW 0.25 Rated operational current AC-3 380 V 400 V 15 V Iq NA 100 Setting range of overload releases Contact sequence Contact sequence AC-3 A				IE3 ✓
Motor ratings Motor rating AC-3 AC-3 Bated operational current AC-3 380 V 400 V 415 V	Notes			Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging.
Motor rating AC-3 380 V 400 V 415 V Rated operational current AC-3 380 V 400 V 415 V In Indiana	Connection to SmartWire-DT			no
AC-3 380 V 400 V 415 V AC-3 380 V 400 V 415 V Rated operational current AC-3 380 V 400 V 415 V Rated short-circuit current 380 - 415 V Retting range Setting range of overload releases Coordination Contact sequence Actually september of the sequence	Motor ratings			
Setting range of overload releases	Motor rating			
Act a growth and current AC-3 380 V 400 V 415 V Rated Short-circuit current 380 - 415 V Retting range Setting range of overload releases Coordination Type of coordination "1" Type of coordination "2" Type of coordination "2" Actuating voltage Actuating voltage Actuating voltage Extra A D.83 - 1 Type of coordination "1" Type of coordination "2" Actuating voltage Extra A D.83 - 1 Actuating voltage Actuating voltage Extra A D.83 - 1 Actuating voltage Actuating voltage Extra A D.83 - 1 Actuating voltage	AC-3			
AC-3 380 V 400 V 415 V Rated short-circuit current 380 - 415 V Setting range Setting range of overload releases Locardination Contact sequence Accusating voltage Accusating voltage	380 V 400 V 415 V	Р	kW	0.25
Rated short-circuit current 380 - 415 V Setting range Setting range of overload releases Ir A O.63 - 1 Type of coordination "1" Type of coordination "2" Type of coordination "2" Actuating voltage	Rated operational current			
Rated short-circuit current 380 - 415 V Setting range Setting range of overload releases Ir A O.6.3 - 1 Type of coordination "1" Type of coordination "2" Type of coordination "2" Type of coordination "2" Actuating voltage Setting range of overload releases Ir A O.6.3 - 1 Type of coordination "1" Type of coordination "2" Type of coordination "2" Actuating voltage Setting range Actuating voltage Setting range Ir A O.6.3 - 1 O.6.				
Setting range of overload releases Locardination Contact sequence Actualing voltage Setting range of overload releases Locardination Type of coordination "1" Type of coordination "2" Type of coordination "2" Actualing voltage 24 V DC	380 V 400 V 415 V	l _e	Α	0.8
Setting range of overload releases Coordination Type of coordination "1" Type of coordination "2" Type of coordination "2" Actuating voltage Type of coordination "1" Type of coordination "2" Type of coordination "1" Type of coordination "2" Type of coordination "2" Type of coordination "1" Type of coordination "2" Type of coordination "1" Type of coordination "2" Type of coordination "2" Type of coordination "1" Type of coordination "2" Type of coordination "1" Type of coordination "2" Type of	Rated short-circuit current 380 - 415 V	Iq	kA	100
Type of coordination "1" Type of coordination "2" Contact sequence Actuating voltage Type of coordination "1" Type of coordination "2" Type of coordination "2" Type of coordination "2" Type of coordination "2" Type of coordination "1" Type	Setting range			
Type of coordination "2" Type of coordination "2" Actuating voltage Type of coordination "2" Actuating voltage Type of coordination "2" Actuating voltage	Setting range of overload releases	I _r	Α	0.63 - 1
Actuating voltage 24 V DC	Coordination			Type of coordination "1" Type of coordination "2"
	Contact sequence			M 3~
DC voltage	Actuating voltage			
				DC voltage

Motor-protective circuit-breakers PKZM0-1

Contactor DILM7-10(...)

DOL starter wiring set

Mechanical connection element and electrical electric contact module PKZM0-XDM12

Notes

BK25/3-PKZ0-E extension terminal and if necessary B3.../...-PKZ0 three-phase commoning link can be added to motor-starter combinations to make Type F starters in accordance with UL508.

Notes

The DOL starters (complete units) consist of a PKZM0 motor protective circuit breaker and a DILM contactor. These combinations are mounted on the busbar adapters.

The connection of the main circuit between the motor protective circuit breaker and the contactor is established with an electrical contact module.

Cannot be combined with NHI-E-...-PKZ0-C standard auxiliary contact with spring-cage terminal.

Further information Technical data PKZM0 Accessories PKZ Technical data DILM Accessories DILM Page

→ PKZM0

→ 072896

→ DILM

→ 281199

Technical data General

Standards			UL 508 (on request) CSA C 22.2 No. 14 (on request)
Main conducting paths			
Rated impulse withstand voltage	U_{imp}	V AC	6000
Overvoltage category/pollution degree			III/3
Rated operational voltage	U _e	V	230 - 415
Rated operational current			
Open, 3-pole: 50 – 60 Hz			
380 // 400 //	1	Λ	1

PKZM0 motor-protective circuit-breakers, see motor-protective circuit-breakers/

Additional technical data

DC

DC

Motor protective circuit breaker PKZM0, PKE

			PKZM0 product group DILM contactors, see contactor product group DILET timing relay, ETR, see contactors, electronic timing relays product group
Power consumption			
DC operated	Sealing	W	3
Rating data for approved types			
Auxiliary contacts			
Pilot Duty			
AC operated			A600
DC operated			P300
General Use			
AC		V	600
AC		Α	15

250

Design verification as per IEC/EN 61439

•			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	1
Heat dissipation per pole, current-dependent	P _{vid}	W	1.9
Equipment heat dissipation, current-dependent	P _{vid}	W	5.7
Static heat dissipation, non-current-dependent	P _{vs}	W	2.6
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013])


With short-circuit release Rated control supply voltage Us at AC 50HZ Rated control supply voltage Us at AC 60HZ V 0 - 0 Rated control supply voltage Us at DC V 24 - 2 Voltage type for actuating Rated operation power at AC-3, 230 V, 3-phase Rated operation power at AC-3, 400 V Rated power, 460 V, 60 Hz, 3-phase Rated power, 575 V, 60 Hz, 3-phase Rated operation current Ie Rated operation current at AC-3, 400 V Rated operation current at AC-3, 400 V Rated conditional short-circuit current, type 1, 480 Y/277 V Rated conditional short-circuit current, type 1, 600 Y/347 V Rated conditional short-circuit current, type 2, 230 V Rated conditional short-circuit current, type 2, 400 V Number of auxiliary contacts as normally open contact 1	t starter
Rated control supply voltage Us at AC 50HZ Rated control supply voltage Us at AC 60HZ V 0 - 0 Rated control supply voltage Us at DC V 24 - 2 Voltage type for actuating Rated operation power at AC-3, 230 V, 3-phase Rated operation power at AC-3, 400 V Rated power, 460 V, 60 Hz, 3-phase Rated operation current le Rated operation current at AC-3, 400 V Rated operation current at AC-3, 400 V Rated conditional short-circuit current, type 1, 480 Y/277 V Rated conditional short-circuit current, type 1, 600 Y/347 V Rated conditional short-circuit current, type 2, 230 V Rated conditional short-circuit current, type 2, 400 V Number of auxiliary contacts as normally open contact	
Rated control supply voltage Us at AC 60HZ Rated control supply voltage Us at DC V 24 - 22 Voltage type for actuating DC Rated operation power at AC-3, 230 V, 3-phase Rated operation power at AC-3, 400 V Rated power, 460 V, 60 Hz, 3-phase Rated power, 575 V, 60 Hz, 3-phase Rated operation current le A 0.8 Rated operation current at AC-3, 400 V Overload release current setting A 0.63 - Rated conditional short-circuit current, type 1, 480 Y/277 V Rated conditional short-circuit current, type 1, 600 Y/347 V Rated conditional short-circuit current, type 2, 230 V Rated conditional short-circuit current, type 2, 400 V Number of auxiliary contacts as normally open contact	
Rated control supply voltage Us at DC Voltage type for actuating Rated operation power at AC-3, 230 V, 3-phase Rated operation power at AC-3, 400 V Rated power, 460 V, 60 Hz, 3-phase Rated power, 575 V, 60 Hz, 3-phase Rated operation current le Rated operation current at AC-3, 400 V Rated operation current at AC-3, 400 V Rated conditional short-circuit current, type 1, 480 Y/277 V Rated conditional short-circuit current, type 1, 600 Y/347 V Rated conditional short-circuit current, type 2, 230 V Rated conditional short-circuit current, type 2, 400 V Number of auxiliary contacts as normally open contact	
Voltage type for actuating Rated operation power at AC-3, 230 V, 3-phase Rated operation power at AC-3, 400 V Rated power, 460 V, 60 Hz, 3-phase Rated operation current le Rated operation current le A 0.8 Rated operation current at AC-3, 400 V A 1 Overload release current setting A 0.63 - Rated conditional short-circuit current, type 1, 480 Y/277 V Rated conditional short-circuit current, type 1, 600 Y/347 V Rated conditional short-circuit current, type 2, 230 V Rated conditional short-circuit current, type 2, 400 V Number of auxiliary contacts as normally open contact	
Rated operation power at AC-3, 230 V, 3-phase kW 0.12 Rated operation power at AC-3, 400 V kW 0.25 Rated power, 460 V, 60 Hz, 3-phase kW 0 Rated power, 575 V, 60 Hz, 3-phase kW 0 Rated operation current le A 0.8 Rated operation current at AC-3, 400 V A 1 Overload release current setting A 0.63 - Rated conditional short-circuit current, type 1, 480 Y/277 V A 0 Rated conditional short-circuit current, type 1, 600 Y/347 V A 0 Rated conditional short-circuit current, type 2, 230 V A 50000 Rated conditional short-circuit current, type 2, 400 V A 500000 Number of auxiliary contacts as normally open contact 1	4
Rated operation power at AC-3, 400 V Rated power, 460 V, 60 Hz, 3-phase Rated operation current le Rated operation current le A 0.8 Rated operation current at AC-3, 400 V A 1 Overload release current setting A 0.63 - Rated conditional short-circuit current, type 1, 480 Y/277 V A 0 Rated conditional short-circuit current, type 1, 600 Y/347 V A 0 Rated conditional short-circuit current, type 2, 230 V A 50000 Rated conditional short-circuit current, type 2, 400 V Number of auxiliary contacts as normally open contact	
Rated power, 460 V, 60 Hz, 3-phase kW 0 Rated power, 575 V, 60 Hz, 3-phase kW 0 Rated operation current le A 0.8 Rated operation current at AC-3, 400 V A 1 Overload release current setting A 0.63 - Rated conditional short-circuit current, type 1, 480 Y/277 V A 0 Rated conditional short-circuit current, type 1, 600 Y/347 V A 0 Rated conditional short-circuit current, type 2, 230 V A 50000 Rated conditional short-circuit current, type 2, 400 V A 500000 Number of auxiliary contacts as normally open contact 1	
Rated power, 575 V, 60 Hz, 3-phase kW 0 Rated operation current le A 0.8 Rated operation current at AC-3, 400 V A 1 Overload release current setting A 0.63 - Rated conditional short-circuit current, type 1, 480 Y/277 V A 0 Rated conditional short-circuit current, type 1, 600 Y/347 V A 0 Rated conditional short-circuit current, type 2, 230 V A 50000 Rated conditional short-circuit current, type 2, 400 V A 500000 Number of auxiliary contacts as normally open contact 1	
Rated operation current le Rated operation current at AC-3, 400 V A 1 Overload release current setting A 0.63 - Rated conditional short-circuit current, type 1, 480 Y/277 V A 0 Rated conditional short-circuit current, type 1, 600 Y/347 V A 0 Rated conditional short-circuit current, type 2, 230 V A 50000 Rated conditional short-circuit current, type 2, 400 V Number of auxiliary contacts as normally open contact	
Rated operation current at AC-3, 400 V Overload release current setting A 0.63 - Rated conditional short-circuit current, type 1, 480 Y/277 V A 0 Rated conditional short-circuit current, type 1, 600 Y/347 V A 0 Rated conditional short-circuit current, type 2, 230 V A 50000 Rated conditional short-circuit current, type 2, 400 V Number of auxiliary contacts as normally open contact	
Overload release current setting A 0.63 - Rated conditional short-circuit current, type 1, 480 Y/277 V Rated conditional short-circuit current, type 1, 600 Y/347 V Rated conditional short-circuit current, type 2, 230 V Rated conditional short-circuit current, type 2, 230 V Rated conditional short-circuit current, type 2, 400 V A 500000 Number of auxiliary contacts as normally open contact	
Rated conditional short-circuit current, type 1, 480 Y/277 V A 0 Rated conditional short-circuit current, type 1, 600 Y/347 V A 0 Rated conditional short-circuit current, type 2, 230 V A 50000 Rated conditional short-circuit current, type 2, 400 V A 50000 Number of auxiliary contacts as normally open contact 1	
Rated conditional short-circuit current, type 1, 600 Y/347 V A 0 Rated conditional short-circuit current, type 2, 230 V A 50000 Rated conditional short-circuit current, type 2, 400 V A 50000 Number of auxiliary contacts as normally open contact 1	1
Rated conditional short-circuit current, type 2, 230 V Rated conditional short-circuit current, type 2, 400 V A 50000 Number of auxiliary contacts as normally open contact 1	
Rated conditional short-circuit current, type 2, 400 V Number of auxiliary contacts as normally open contact 1	
Number of auxiliary contacts as normally open contact 1	
· · · · · · · · · · · · · · · · · · ·	
Number of auxiliary contacts as normally closed contact 0	
Ambient temperature, upper operating limit °C 60	
Temperature compensated overload protection Yes	
Release class CLAS	S 10
Type of electrical connection of main circuit Screw	v connection
Type of electrical connection for auxiliary- and control current circuit Screw	v connection
Rail mounting possible Yes	
With transformer No	
Number of command positions 0	
Suitable for emergency stop No	
Coordination class according to IEC 60947-4-3	2
Number of indicator lights 0	
External reset possible No	
With fuse No	
Degree of protection (IP)	

Degree of protection (NEMA) Supporting protocol for TCP/IP No Supporting protocol for PROFIBUS No Supporting protocol for CAN Supporting protocol for CAN Supporting protocol for INTERBUS No Supporting protocol for INTERBUS No Supporting protocol for MODBUS Supporting protocol for MODBUS Supporting protocol for Data-Highway No Supporting protocol for DeviceNet Supporting protocol for SUCONET Supporting protocol for SUCONET Supporting protocol for PROFINET IO Supporting protocol for PROFINET OBA Supporting protocol for SERCOS No Supporting protocol for SERCOS No	
Supporting protocol for PROFIBUS Supporting protocol for CAN Supporting protocol for INTERBUS No Supporting protocol for ASI Supporting protocol for MODBUS Supporting protocol for Data-Highway No Supporting protocol for Deta-Highway No Supporting protocol for DeviceNet No Supporting protocol for SUCONET No Supporting protocol for PROFINET IO No Supporting protocol for PROFINET CBA Supporting protocol for SERCOS No	
Supporting protocol for CAN Supporting protocol for INTERBUS No Supporting protocol for ASI No Supporting protocol for MODBUS Supporting protocol for Data-Highway No Supporting protocol for DeviceNet No Supporting protocol for SUCONET No Supporting protocol for LON Supporting protocol for PROFINET IO Supporting protocol for PROFINET CBA Supporting protocol for SERCOS No	
Supporting protocol for INTERBUS Supporting protocol for ASI Supporting protocol for MODBUS Supporting protocol for Data-Highway No Supporting protocol for DeviceNet Supporting protocol for SUCONET Supporting protocol for LON Supporting protocol for PROFINET IO Supporting protocol for PROFINET CBA Supporting protocol for SERCOS No	
Supporting protocol for ASI Supporting protocol for MODBUS No Supporting protocol for Data-Highway No Supporting protocol for DeviceNet No Supporting protocol for SUCONET No Supporting protocol for LON Supporting protocol for PROFINET IO Supporting protocol for PROFINET CBA Supporting protocol for SERCOS No	
Supporting protocol for MODBUS Supporting protocol for Data-Highway No Supporting protocol for DeviceNet No Supporting protocol for SUCONET No Supporting protocol for LON Supporting protocol for PROFINET IO Supporting protocol for PROFINET CBA Supporting protocol for SERCOS No	
Supporting protocol for Data-Highway Supporting protocol for DeviceNet Supporting protocol for SUCONET No Supporting protocol for LON Supporting protocol for PROFINET IO Supporting protocol for PROFINET CBA Supporting protocol for SERCOS No	
Supporting protocol for DeviceNet Supporting protocol for SUCONET No Supporting protocol for LON Supporting protocol for PROFINET IO Supporting protocol for PROFINET CBA Supporting protocol for SERCOS No	
Supporting protocol for SUCONET Supporting protocol for LON Supporting protocol for PROFINET IO Supporting protocol for PROFINET CBA Supporting protocol for SERCOS No	
Supporting protocol for LON Supporting protocol for PROFINET IO No Supporting protocol for PROFINET CBA No Supporting protocol for SERCOS No	
Supporting protocol for PROFINET IO Supporting protocol for PROFINET CBA Supporting protocol for SERCOS No	
Supporting protocol for PROFINET CBA Supporting protocol for SERCOS No	
Supporting protocol for SERCOS No	
Connection protected for Foundation Fieldhore	
Supporting protocol for Foundation Fieldbus No	
Supporting protocol for EtherNet/IP No	
Supporting protocol for AS-Interface Safety at Work No	
Supporting protocol for DeviceNet Safety No	
Supporting protocol for INTERBUS-Safety No	
Supporting protocol for PROFIsafe No	
Supporting protocol for SafetyBUS p No	
Supporting protocol for other bus systems No	
Width mm 45	
Height mm 200	
Depth mm 154	

Approvals

Product Standards	UL60947-4-1A; CSA-C22.2 No. 14-10; IEC60947-4-1; CE marking
UL File No.	E123500
UL Category Control No.	NKJH
CSA File No.	12528
CSA Class No.	3211-04
North America Certification	UL listed, CSA certified
Specially designed for North America	No

Dimensions

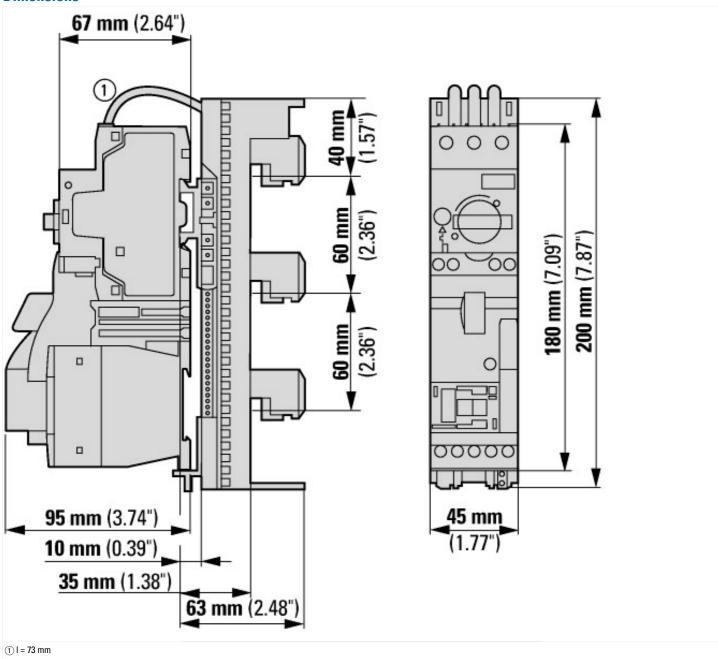

MSC-D-...-M7[...15]BBA...

Assets (links)

Declaration of CE Conformity

00002885

Instruction Leaflets

IL034038ZU2018_06

Additional product information (links)

IL034038ZU (AWA1210-2246) Direct-on-line starter up to 15 A		
IL034038ZU (AWA1210-2246) Direct-on-line starter up to 15 A	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL034038ZU2018_06.pdf	
IL03402015Z (AWA1210-2324) Busbar adapter		
IL03402015Z (AWA1210-2324) Busbar adapter	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402015Z2018_05.pdf	
Motor starters and "Special Purpose Ratings" for the North American market	http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf	
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf	