### DATASHEET - XNH1-S250-BT



NH fuse-switch 3p box terminal 35 - 150 mm²; busbar 60 mm; NH1

XNH1-S250-BT 183052 **Powering Business Worldwide** 

EL-Nummer (Norway)

Part no.

Catalog No.

er 1624027

### **Delivery program**

Basic function			Basic device
Number of poles			3 pole
Mounting type			Busbars of 60 mm
Size			1
Type of connection			Box terminal
Rated operational current	le	А	250
Front degree of protection (XNH installed)			IP20 (Operating status) IP2XC (Contact protection) IP10 (Handle cover open)
Rated operational voltage	Ue	V AC	690
Rated operational voltage	U <sub>e</sub>	V DC	440
Rated conditional short-circuit current		kA	120 (500 V) 100 (690 V)
Flammability characteristics			Self-extinguishing as per UL 94
Description			Current paths of electrolytic copper, silver-plated Cable connection optionally at the top or bottom

### **Technical data**

## Electrical

Eleculcal			
Standards			IEC/EN 60947-3
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated operational voltage	U <sub>e</sub>	V DC	440
Rated operational current	le	А	250
Rated frequency	f	Hz	40 - 60
Rated insulation voltage	Ui	V AC	800
Total heat dissipation at $I_{th}$ (without fuses)	Pv	W	22
Heat dissipation at 80% (without fuses)	Pv	W	14.1
Rated impulse withstand voltage	U <sub>imp</sub>	kV	8
Utilization category AC-23B			
Rated operating voltage	U <sub>e</sub>	V AC	400
Rated operating current	le	А	250
Utilization category AC22B			
Rated operating voltage	U <sub>e</sub>	V AC	500
Rated operating current	le	А	250
Utilization category AC-21B			
Rated operating voltage	U <sub>e</sub>	V AC	690
Rated operating current	l <sub>e</sub>	А	250
Utilization category DC-22B			
Rated operating voltage	U <sub>e</sub>	V DC	DC values on request
Rated operating current	l <sub>e</sub>	А	DC values on request
Utilization category DC21B			
Rated operating voltage	U <sub>e</sub>	V DC	DC values on request
Rated operating current	le	А	DC values on request
Rated conditional short-circuit current		kA	120 (500 V) 100 (690 V)
Rated short-time withstand current	I <sub>cw</sub>	kA	10

Max, fuse			
Size according to DIN VDE 0636-2			1
Max. permitted power loss per fuse link	P <sub>v</sub>	W	23
		**	
Lifespan, electrical Mechanical	Operations		200
Front degree of protection (XNH installed)			IP20 (Operating status) IP2XC (Contact protection) IP10 (Handle cover open)
Ambient temperature		°C	-25 - +55
Rated operating mode			Permanent operation
Activation			Dependent manual activation
Mounting position			Vertical, horizontal
Altitude		m	Max. 2000
Overvoltage category/pollution degree			111/3
RoHS (in accordance with Directive 2002/95/EC of the European Parliament and Council)			Yes
Direction of incoming supply			as required (FLEX System)
Lockable			Yes, optional
Sealable			Yes, Standard
Material characteristics			
Material			Polyamide
Colour			Grey
Flammability characteristics			Self-extinguishing as per UL 94
Halogen-free			Yes
Voltage test			Yes, sliding inspection windows
Lifespan, mechanical	Operations		1400
Track resistance			CTI 600
Heat deflection temperature		°C	125
Terminal capacity			
Flange connection			
Bolt diameter			M10
Cable lug max. width		mm	37
Flat busbar		mm	30 x 10
Box terminal			
Stranded		mm <sup>2</sup>	35 - 150 Cu/Al
Copper strip	Number of segments x width x thickness	mm	10 x 16 x 0,8
Box terminal			
Stranded		mm <sup>2</sup>	25 - 150 Cu
Copper band	Number of segments x width x thickness	mm	6 x 16 x 0,8
Clamp-type terminal			
Stranded		mm <sup>2</sup>	10 - 150 Cu/Al
Double clamp-type terminal			

# Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	А	250
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	7.3
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	22
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.

10.2.3.2 Verification of resistance of insulating materials to normal heatMeets the product standard's requirements.10.2.3.3 Verification of resistance of insulating materials to abnormal heatMeets the product standard's requirements.10.2.4 Resistance to ultra-violet (UV) radiationMeets the product standard's requirements.10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.10.3.7 InscriptionsMeets the product standard's requirements.10.4.4 Clearances and creepage distancesDoes not apply, since the entire switchgear needs to be evaluated.10.4.7 Inscription of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.9 Insulation propertiesDoes not apply, since the entire switchgear needs to be evaluated.10.9 Insulation propertiesDoes not apply, since the entire switchgear needs to be evaluated.10.9 Insulation propertiesDoes not apply, since the entire switchgear needs to be evaluated.10.9 Insulation propertiesDoes not apply, since the entire switchgear needs to be evaluated.10.9.1 Rubation propertiesU <sub>1</sub> & 800 V AC10.9.2 Power-frequency electric strengthU <sub>1</sub> & 800 V AC10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.		
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects       Meets the product standard's requirements.         10.2.4 Resistance to ultra-violet (UV) radiation       Meets the product standard's requirements.         10.2.5 Lifting       Does not apply, since the entire switchgear needs to be evaluated.         10.2.6 Mechanical impact       Does not apply, since the entire switchgear needs to be evaluated.         10.2.7 Inscriptions       Does not apply, since the entire switchgear needs to be evaluated.         10.2.6 Mechanical impact       Does not apply, since the entire switchgear needs to be evaluated.         10.2.7 Inscriptions       Does not apply, since the entire switchgear needs to be evaluated.         10.4 Clearances and creepage distances       Is the panel builder's responsibility.         10.5 Protection against electric shock       Does not apply, since the entire switchgear needs to be evaluated.         10.6 Incorporation of switching devices and components       Does not apply, since the entire switchgear needs to be evaluated.         10.7 Internal electrical circuits and connections       Is the panel builder's responsibility.         10.8 Connections for external conductors       Is the panel builder's responsibility.         10.9 Insulation properties       Is the panel builder's responsibility.         10.9.2 Power-frequency electric strength       Is the panel builder's responsibility.         10.9.3 Impulse	10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
and fire due to internal electric effects       Image: Construct of the construct of	10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.5 Lifting       Does not apply, since the entire switchgear needs to be evaluated.         10.2.6 Mechanical impact       Does not apply, since the entire switchgear needs to be evaluated.         10.2.7 Inscriptions       Meets the product standard's requirements.         10.3 Degree of protection of ASSEMBLIES       Does not apply, since the entire switchgear needs to be evaluated.         10.4 Clearances and creepage distances       Is the panel builder's responsibility.         10.5 Protection against electric shock       Does not apply, since the entire switchgear needs to be evaluated.         10.7 Internal electrical circuits and connections       Is the panel builder's responsibility.         10.8 Connections for external conductors       Is the panel builder's responsibility.         10.9.1 Insulation properties       Is the panel builder's responsibility.         10.9.2 Power-frequency electric strength       Is the panel builder's responsibility.         10.9.3 Impulse withstand voltage       Is the panel builder's responsibility.         10.9.4 Testing of enclosures made of insulating material       It with game and enclosures insulating material		Meets the product standard's requirements.
10.2.6 Mechanical impactCoes not apply, since the entire switchgear needs to be evaluated.10.2.7 InscriptionsMeets the product standard's requirements.10.3.D ggree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesMeets the panel builder's responsibility.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsMeets the panel builder's responsibility.10.7 Internal electrical circuits and connectionsMeets the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthMeets the panel builder's responsibility.10.9.3 Impulse withstand voltageMeets the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialMeets the panel builder's responsibility.	10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.7 Inscriptions       Meets the product standard's requirements.         10.3 Degree of protection of ASSEMBLIES       Does not apply, since the entire switchgear needs to be evaluated.         10.4 Clearances and creepage distances       Is the panel builder's responsibility.         10.5 Protection against electric shock       Does not apply, since the entire switchgear needs to be evaluated.         10.6 Incorporation of switching devices and components       Does not apply, since the entire switchgear needs to be evaluated.         10.7 Internal electrical circuits and connections       Is the panel builder's responsibility.         10.8 Connections for external conductors       Is the panel builder's responsibility.         10.9 Insulation properties       Is the panel builder's responsibility.         10.9.2 Power-frequency electric strength       U <sub>i</sub> = 800 V AC         10.9.3 Impulse withstand voltage       Is the panel builder's responsibility.         10.9.4 Testing of enclosures made of insulating material       Is the panel builder's responsibility.	10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.3 Degree of protection of ASSEMBLIES       Does not apply, since the entire switchgear needs to be evaluated.         10.4 Clearances and creepage distances       Is the panel builder's responsibility.         10.5 Protection against electric shock       Does not apply, since the entire switchgear needs to be evaluated.         10.6 Incorporation of switching devices and components       Does not apply, since the entire switchgear needs to be evaluated.         10.7 Internal electrical circuits and connections       Is the panel builder's responsibility.         10.8 Connections for external conductors       Is the panel builder's responsibility.         10.9 Insulation properties       Is the panel builder's responsibility.         10.9.2 Power-frequency electric strength       Image: Step anel builder's responsibility.         10.9.3 Inpulse withstand voltage       Image: Step anel builder's responsibility.         10.9.4 Testing of enclosures made of insulating material       Image: Step anel builder's responsibility.	10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distancesIs the panel builder's responsibility.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9 Insulation propertiesImage: Content of the panel builder's responsibility.10.9.2 Power-frequency electric strengthImage: Content of the panel builder's responsibility.10.9.3 Impulse withstand voltageImage: Content of the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialImage: Content of the panel builder's responsibility.	10.2.7 Inscriptions	Meets the product standard's requirements.
10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsImage: Bit the panel builder's responsibility.10.8 Connections for external conductorsImage: Bit the panel builder's responsibility.10.9 Insulation propertiesImage: Bit the panel builder's responsibility.10.9.2 Power-frequency electric strengthImage: Bit the panel builder's responsibility.10.9.3 Impulse withstand voltageImage: Bit the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialImage: Bit the panel builder's responsibility.	10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components       Does not apply, since the entire switchgear needs to be evaluated.         10.7 Internal electrical circuits and connections       Is the panel builder's responsibility.         10.8 Connections for external conductors       Is the panel builder's responsibility.         10.9 Insulation properties       Image: Component of the panel builder's responsibility.         10.9.2 Power-frequency electric strength       Image: Component of the panel builder's responsibility.         10.9.3 Impulse withstand voltage       Image: Component of the panel builder's responsibility.         10.9.4 Testing of enclosures made of insulating material       Image: Component of the panel builder's responsibility.	10.4 Clearances and creepage distances	Is the panel builder's responsibility.
10.7 Internal electrical circuits and connections       Is the panel builder's responsibility.         10.8 Connections for external conductors       Is the panel builder's responsibility.         10.9 Insulation properties       Is the panel builder's responsibility.         10.9.2 Power-frequency electric strength       Is the panel builder's responsibility.         10.9.3 Impulse withstand voltage       Is the panel builder's responsibility.         10.9.4 Testing of enclosures made of insulating material       Is the panel builder's responsibility.	10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.8 Connections for external conductors     Is the panel builder's responsibility.       10.9 Insulation properties     Is the panel builder's responsibility.       10.9.2 Power-frequency electric strength     Image: Content of the panel builder's responsibility.       10.9.3 Impulse withstand voltage     Image: Content of the panel builder's responsibility.       10.9.4 Testing of enclosures made of insulating material     Image: Content of the panel builder's responsibility.	10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.9 Insulation properties     Market and a comparison of a comparis	10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.9.2 Power-frequency electric strength     Image: Will and Will a	10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage     Is the panel builder's responsibility.       10.9.4 Testing of enclosures made of insulating material     Is the panel builder's responsibility.	10.9 Insulation properties	
10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility.	10.9.2 Power-frequency electric strength	U <sub>i</sub> = 800 V AC
	10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
	10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise       The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.	10.10 Temperature rise	
10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed.	10.11 Short-circuit rating	
10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed.	10.12 Electromagnetic compatibility	
10.13 Mechanical function       The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.	10.13 Mechanical function	


#### **Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Fuse switch disconnector (EC001040)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Fuse switch disconnector (ecl@ss10.0.1-27-37-14-01 [AKF058013])

Version as main switch		No
Version as safety switch		No
Max. rated operation voltage Ue AC	V	690
Rated permanent current lu	А	250
Rated operation power at AC-23, 400 V	kW	0
Conditioned rated short-circuit current Iq	kA	120
Rated short-time withstand current lcw	kA	6
Suitable for fuses		NH1
Number of poles		3
With error protection		No
Type of electrical connection of main circuit		Frame clamp
Cable entry		Other
Equipped with connectors		No
Suitable for ground mounting		No
Suitable for front mounting 4-hole		No
Suitable for busbar mounting		Yes
Type of control element		Cover grip
Position control element		Front side
Motor drive optional		No
Motor drive integrated		No
Version as emergency stop installation		No
Degree of protection (IP), front side		Other

## Dimensions

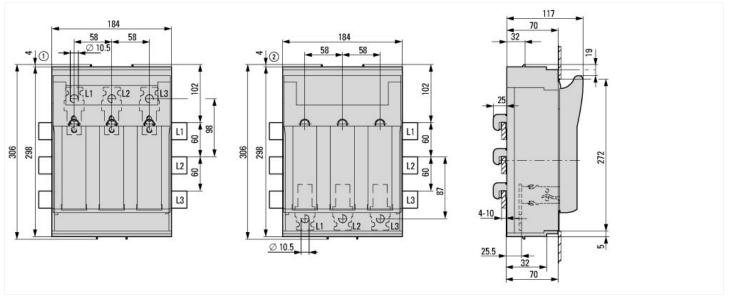

## Additional product information (links)

IL0131112ZU Fuse switch-disconnector XNH

IL0131112ZU Fuse switch-disconnector XNH ftp://ftp.moeller.net/DOCUMENTATION/AWA\_INSTRUCTIONS/IL0131112ZU2017\_02.pdf