


**Motor-protective circuit-breaker, 3p, Ir=8-32A, standard**


**Part no.** PKE32/XTU-32  
**Catalog No.** 121734  
**Alternate Catalog No.** XTPE032BCSNL  
**EL-Nummer (Norway)** 4355183

**Delivery program**


|                                                         |             |   |                                                                                                                         |
|---------------------------------------------------------|-------------|---|-------------------------------------------------------------------------------------------------------------------------|
| Product range                                           |             |   | PKE motor protective circuit-breakers with electronic wide-range overload protection up to 32 A                         |
| Basic function                                          |             |   | Motor protection<br>Motor protection for heavy starting duty                                                            |
| Single unit/Complete unit                               |             |   | Complete device with standard knob                                                                                      |
|                                                         |             |   |                                                                                                                         |
| Notes                                                   |             |   | Also suitable for motors with efficiency class IE3.<br>IE3-ready devices are identified by the logo on their packaging. |
| Setting range of overload releases<br>                  | $I_r$       | A | 8 - 32                                                                                                                  |
| Function                                                |             |   | With overload release                                                                                                   |
| Rated uninterrupted current = rated operational current | $I_u = I_e$ | A | 32                                                                                                                      |

**Motor rating**

| AC-3                             |                     |       |       |       |       |
|----------------------------------|---------------------|-------|-------|-------|-------|
| 220 V 230 V 240 V                | P                   | kW    | 7.5   |       |       |
| 380 V 400 V 415 V                | P                   | kW    | 15    |       |       |
| 440 V                            | P                   | kW    | 15    |       |       |
| 500 V                            | P                   | kW    | 18.5  |       |       |
| 660 V 690 V                      | P                   | kW    | 30    |       |       |
| Motor output/rated motor current |                     |       |       |       |       |
| Motor rating                     | Rated motor current |       |       |       |       |
|                                  | AC-3                |       |       |       |       |
|                                  | 220 V               | 380 V | 440 V | 500 V | 660 V |
|                                  | 230 V               | 400 V |       |       | 690 V |
|                                  | 240 V               | 415 V |       |       |       |
| P                                | I                   | I     | I     | I     | I     |
| kW                               | A                   | A     | A     | A     | A     |
| 2.2                              | 8.7                 | -     | -     | -     | -     |
| 3                                | 11.5                | -     | -     | -     | -     |
| 4                                | 14.8                | 8.5   | -     | -     | -     |
| 5.5                              | 19.6                | 11.3  | 10.2  | 9     | -     |
| 7.5                              | 26.4                | 15.2  | 13.8  | 12.1  | 8.8   |
| 11                               | -                   | 21.7  | 19.8  | 17.4  | 12.6  |
| 15                               | -                   | 29.3  | 26.6  | 23.4  | 17    |
| 18.5                             | -                   | -     | -     | 28.9  | 20.9  |
| 22                               | -                   | -     | -     | -     | 23.8  |
| 30                               | -                   | -     | -     | -     | 32    |

**Technical data**
**General**

|                     |  |    |                                                                                |
|---------------------|--|----|--------------------------------------------------------------------------------|
| Standards           |  |    | IEC/EN 60947, VDE 0660, UL, CSA                                                |
| Climatic proofing   |  |    | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature |  |    |                                                                                |
| Storage             |  | °C | - 40 - 80                                                                      |
| Open                |  | °C | -25 - +55                                                                      |
| Enclosed            |  | °C | - 25 - 40                                                                      |

|                                                                           |  |                 |                                                                                   |
|---------------------------------------------------------------------------|--|-----------------|-----------------------------------------------------------------------------------|
| Mounting position                                                         |  |                 |  |
| Direction of incoming supply                                              |  |                 | as required                                                                       |
| Degree of protection                                                      |  |                 |                                                                                   |
| Device                                                                    |  |                 | IP20                                                                              |
| Terminations                                                              |  |                 | IP00                                                                              |
| Protection against direct contact when actuated from front (EN 50274)     |  |                 | Finger and back-of-hand proof                                                     |
| Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068-2-27 |  | g               | 25                                                                                |
| Altitude                                                                  |  | m               | Max. 2000                                                                         |
| Terminal capacity main cable                                              |  |                 |                                                                                   |
| Screw terminals                                                           |  |                 |                                                                                   |
| Solid                                                                     |  | mm <sup>2</sup> | 1 x (1 - 6)<br>2 x (1 - 6)                                                        |
| Flexible with ferrule to DIN 46228                                        |  | mm <sup>2</sup> | 1 x (1 - 6)<br>2 x (1 - 6)                                                        |
| Solid or stranded                                                         |  | AWG             | 14 - 10                                                                           |
| Stripping length                                                          |  | mm              | 10                                                                                |
| Specified tightening torque for terminal screws                           |  |                 |                                                                                   |
| Main cable                                                                |  | Nm              | 1.7                                                                               |
| Control circuit cables                                                    |  | Nm              | 1                                                                                 |

### Main conducting paths

|                                                         |             |               |                                                                                                                                                                                                                                                  |
|---------------------------------------------------------|-------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated impulse withstand voltage                         | $U_{imp}$   | V AC          | 6000                                                                                                                                                                                                                                             |
| Overvoltage category/pollution degree                   |             |               | III/3                                                                                                                                                                                                                                            |
| Rated operational voltage                               | $U_e$       | V AC          | 690                                                                                                                                                                                                                                              |
| Rated uninterrupted current = rated operational current | $I_u = I_e$ | A             | 32                                                                                                                                                                                                                                               |
| Rated frequency                                         | f           | Hz            | 40 - 60                                                                                                                                                                                                                                          |
| Current heat loss (3 pole at operating temperature)     |             | W             | 11.4                                                                                                                                                                                                                                             |
| Lifespan, mechanical                                    | Operations  | $\times 10^6$ | 0.05                                                                                                                                                                                                                                             |
| Lifespan, electrical (AC-3 at 400 V)                    |             |               |                                                                                                                                                                                                                                                  |
| Lifespan, electrical                                    | Operations  | $\times 10^6$ | 0.05                                                                                                                                                                                                                                             |
| Max. operating frequency                                |             | Ops/h         | 60                                                                                                                                                                                                                                               |
| Motor switching capacity                                |             |               |                                                                                                                                                                                                                                                  |
| AC-3 (up to 690V)                                       |             | A             | 32                                                                                                                                                                                                                                               |
| AC-4 cycle operation                                    |             |               |                                                                                                                                                                                                                                                  |
| Minimum current flow times                              |             | ms            | 500 (Class 5)<br>700 (Class 10)<br>900 (Class 15)<br>1000 (Class 20)                                                                                                                                                                             |
| Minimum cut-out periods                                 |             | ms            | 500                                                                                                                                                                                                                                              |
| Note                                                    |             | ms            | In AC-4 cycle operation, going below the minimum current flow time can cause overheating of the load (motor).<br>For all combinations with an SWD activation, you need not adhere to the minimum current flow times and minimum cut-out periods. |

### Trip blocks

|                                    |  |              |                                                                                                         |
|------------------------------------|--|--------------|---------------------------------------------------------------------------------------------------------|
| Temperature compensation           |  |              |                                                                                                         |
| to IEC/EN 60947, VDE 0660          |  | °C           | - 5 ... 40                                                                                              |
| Operating range                    |  | °C           | - 25 ... 55                                                                                             |
| Setting range of overload releases |  | $\times I_u$ | 0.25 - 1                                                                                                |
| short-circuit release              |  |              | Basic device, fixed: $15.5 \times I_u$<br>Trip block, fixed: $15.5 \times I_r$<br>delayed approx. 60 ms |
| Short-circuit release tolerance    |  |              | $\pm 20\%$                                                                                              |
| Phase-failure sensitivity          |  |              | IEC/EN 60947-4-1, VDE 0660 Part 102                                                                     |

### Rating data for approved types

|                      |  |  |  |
|----------------------|--|--|--|
| Switching capacity   |  |  |  |
| Maximum motor rating |  |  |  |
| Three-phase          |  |  |  |

|                                                |      |             |
|------------------------------------------------|------|-------------|
| 200 V<br>208 V                                 | HP   | 5           |
| 230 V<br>240 V                                 | HP   | 7.5         |
| 460 V<br>480 V                                 | HP   | 15          |
| 575 V<br>600 V                                 | HP   | 20          |
| Single-phase                                   |      |             |
| 115 V<br>120 V                                 | HP   | 1.5         |
| 230 V<br>240 V                                 | HP   | 3           |
| General use                                    | A    | 32          |
| Short Circuit Current Rating, group protection | SCCR |             |
| 600 V High Fault                               |      |             |
| SCCR (fuse)                                    | kA   | 100         |
| max. Fuse                                      | A    | 100 Class J |

## Design verification as per IEC/EN 61439

|                                                                                                                        |                   |    |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|-------------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Technical data for design verification                                                                                 |                   |    |                                                                                                                                  |
| Rated operational current for specified heat dissipation                                                               | I <sub>n</sub>    | A  | 32                                                                                                                               |
| Heat dissipation per pole, current-dependent                                                                           | P <sub>vid</sub>  | W  | 3.8                                                                                                                              |
| Equipment heat dissipation, current-dependent                                                                          | P <sub>vid</sub>  | W  | 11.4                                                                                                                             |
| Static heat dissipation, non-current-dependent                                                                         | P <sub>vs</sub>   | W  | 0                                                                                                                                |
| Heat dissipation capacity                                                                                              | P <sub>diss</sub> | W  | 0                                                                                                                                |
| Operating ambient temperature min.                                                                                     |                   | °C | -25                                                                                                                              |
| Operating ambient temperature max.                                                                                     |                   | °C | 55                                                                                                                               |
| IEC/EN 61439 design verification                                                                                       |                   |    |                                                                                                                                  |
| 10.2 Strength of materials and parts                                                                                   |                   |    |                                                                                                                                  |
| 10.2.2 Corrosion resistance                                                                                            |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.1 Verification of thermal stability of enclosures                                                               |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat                                             |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.4 Resistance to ultra-violet (UV) radiation                                                                       |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.5 Lifting                                                                                                         |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.6 Mechanical impact                                                                                               |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.7 Inscriptions                                                                                                    |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.3 Degree of protection of ASSEMBLIES                                                                                |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.4 Clearances and creepage distances                                                                                 |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.5 Protection against electric shock                                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.6 Incorporation of switching devices and components                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.7 Internal electrical circuits and connections                                                                      |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.8 Connections for external conductors                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9 Insulation properties                                                                                             |                   |    |                                                                                                                                  |
| 10.9.2 Power-frequency electric strength                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.3 Impulse withstand voltage                                                                                       |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.4 Testing of enclosures made of insulating material                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.10 Temperature rise                                                                                                 |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                                                                                             |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                                                                                    |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                                                                              |                   |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 7.0

|                                                                                                                                                                                                       |    |                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|------------------------------------------|
| Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074)                                                                                                            |    |                                          |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ecl@ss10.0.1-27-37-04-01 [AGZ529016]) |    |                                          |
| Overload release current setting                                                                                                                                                                      | A  | 8 - 32                                   |
| Adjustment range undelayed short-circuit release                                                                                                                                                      | A  | 496 - 496                                |
| With thermal protection                                                                                                                                                                               |    | Yes                                      |
| Phase failure sensitive                                                                                                                                                                               |    | Yes                                      |
| Switch off technique                                                                                                                                                                                  |    | Electronic                               |
| Rated operating voltage                                                                                                                                                                               | V  | 690 - 690                                |
| Rated permanent current I <sub>u</sub>                                                                                                                                                                | A  | 32                                       |
| Rated operation power at AC-3, 230 V                                                                                                                                                                  | kW | 7.5                                      |
| Rated operation power at AC-3, 400 V                                                                                                                                                                  | kW | 15                                       |
| Type of electrical connection of main circuit                                                                                                                                                         |    | Screw connection                         |
| Type of control element                                                                                                                                                                               |    | Turn button                              |
| Device construction                                                                                                                                                                                   |    | Built-in device fixed built-in technique |
| With integrated auxiliary switch                                                                                                                                                                      |    | No                                       |
| With integrated under voltage release                                                                                                                                                                 |    | No                                       |
| Number of poles                                                                                                                                                                                       |    | 3                                        |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, AC                                                                                                                                    | kA | 100                                      |
| Degree of protection (IP)                                                                                                                                                                             |    | IP20                                     |
| Height                                                                                                                                                                                                | mm | 102.5                                    |
| Width                                                                                                                                                                                                 | mm | 45                                       |
| Depth                                                                                                                                                                                                 | mm | 102.5                                    |


## Approvals

|                                      |  |                                                                          |
|--------------------------------------|--|--------------------------------------------------------------------------|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No.                          |  | E36332                                                                   |
| UL Category Control No.              |  | NLRV                                                                     |
| CSA File No.                         |  | 165628                                                                   |
| CSA Class No.                        |  | 3211-05                                                                  |
| North America Certification          |  | UL listed, CSA certified                                                 |
| Specially designed for North America |  | No                                                                       |


Characteristics

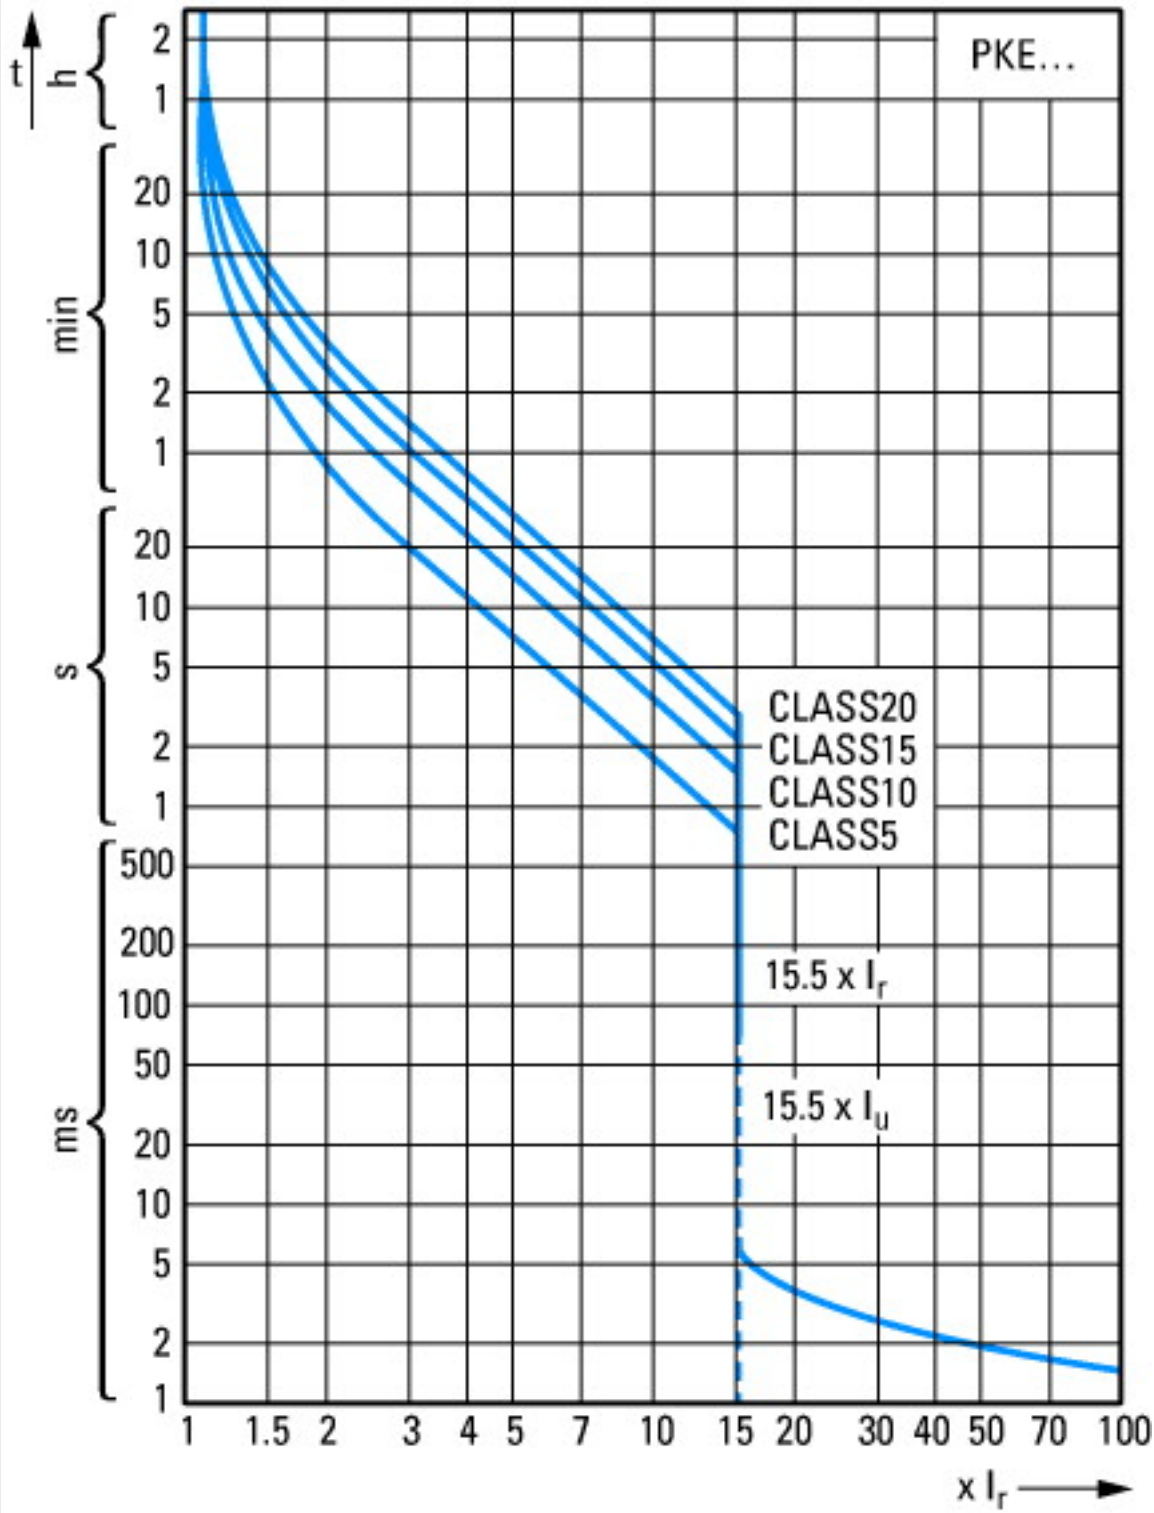

Tripping characteristics

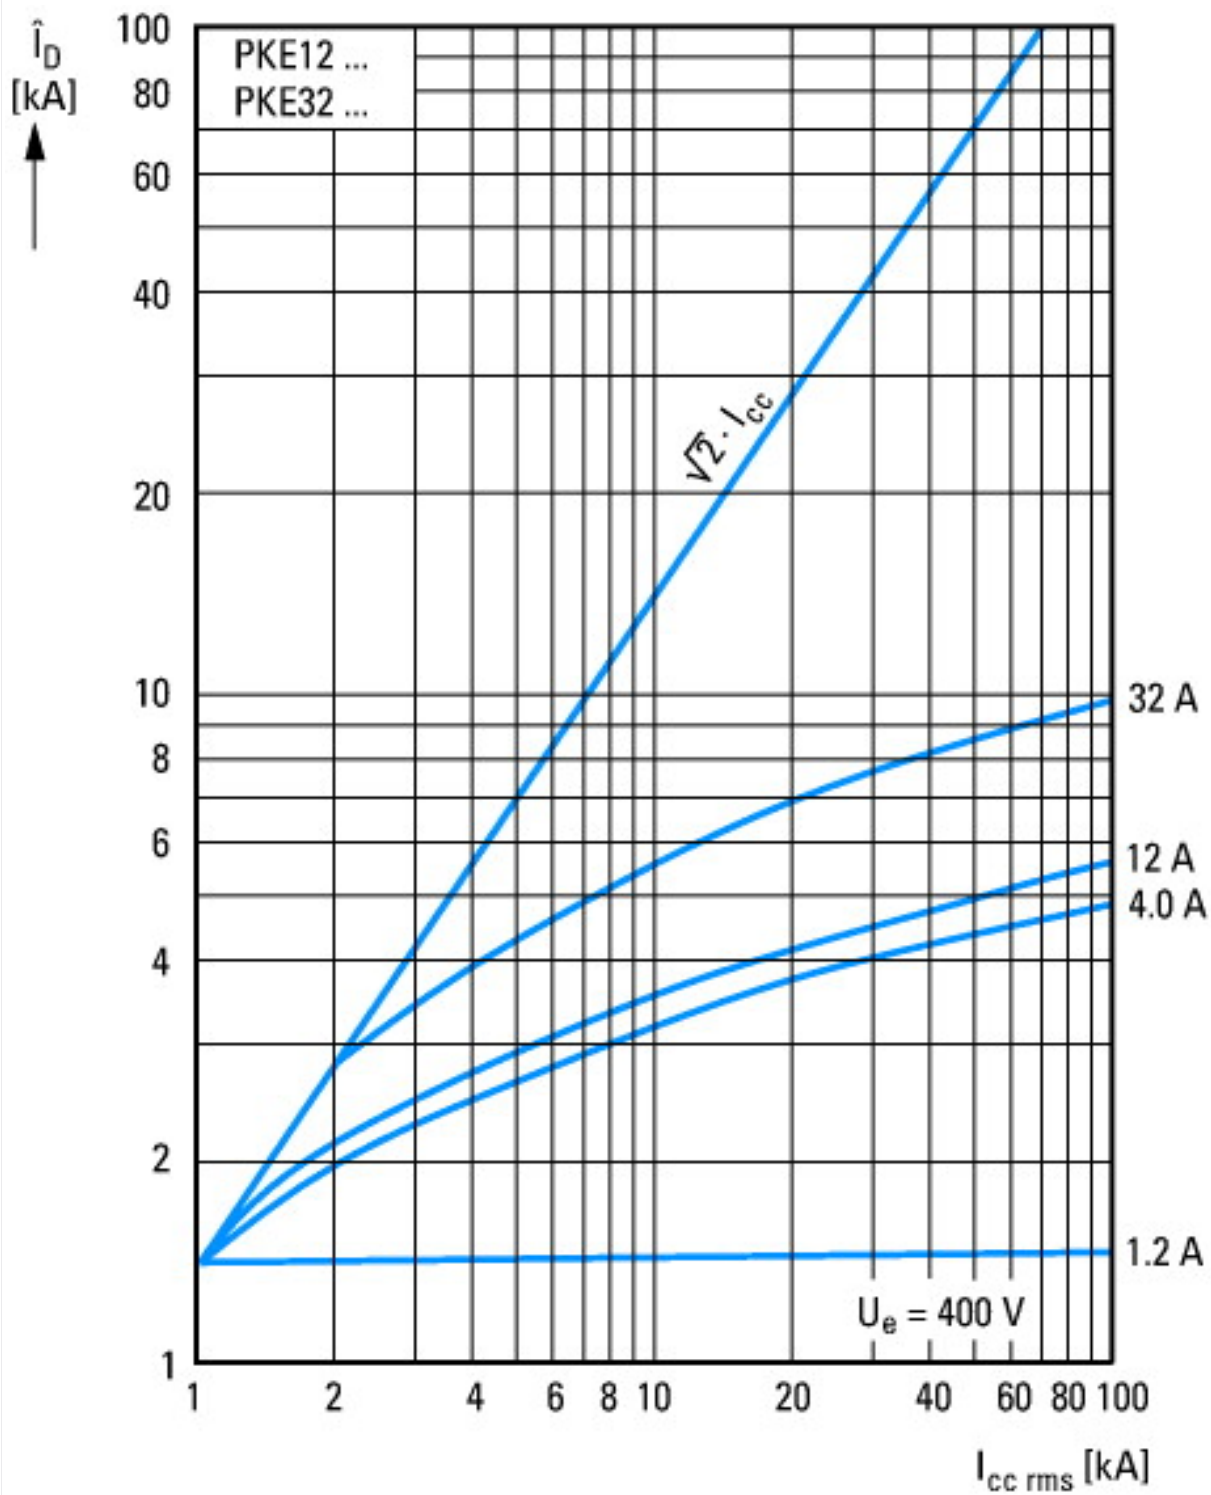


Let-through current

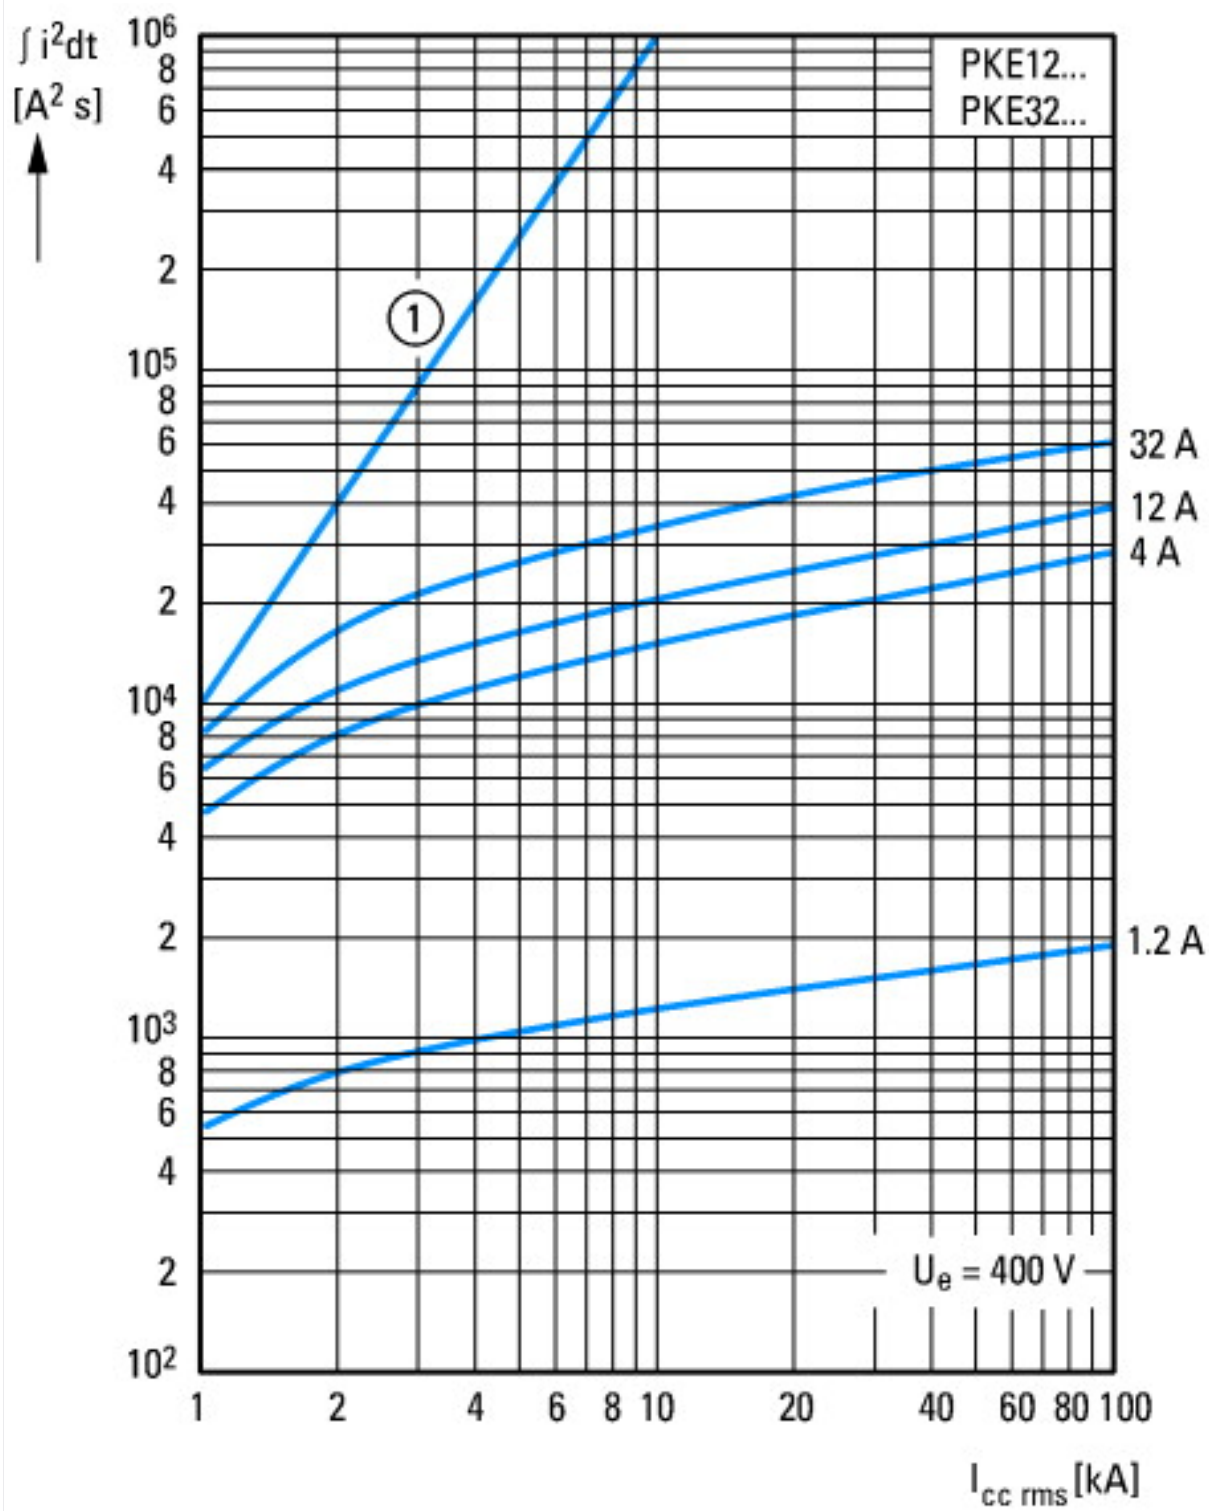

① 1 half-cycle  
Let-through energy

Dimensions

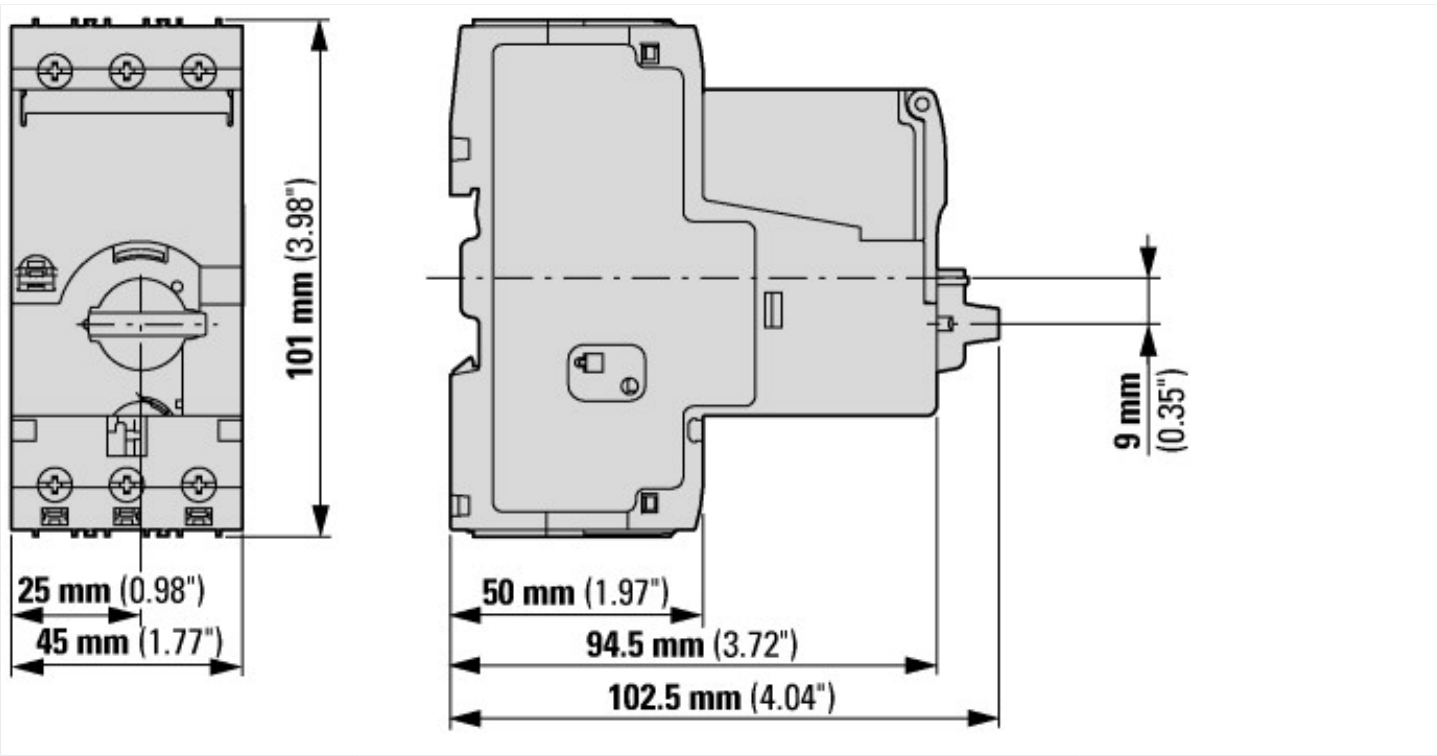

Assets (links)

Declaration of CE Conformity  
00002851

Instruction Leaflets  
IL03402019Z2018\_03

Manuals  
MN03402004Z\_DE\_EN (German)  
MN03402004Z\_DE\_EN (English)

Additional product information (links)

|                                                                                                                       |                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IL03402019Z (AWA1210-2490) PKE motor-protective circuit-breaker with wide-range overload protection                   |                                                                                                                                                                                                                 |
| IL03402019Z (AWA1210-2490) PKE motor-protective circuit-breaker with wide-range overload protection                   | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402019Z2018_03.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402019Z2018_03.pdf</a>                                           |
| MN03402004Z PKE12 and PKE32 motor-protective circuit-breakers; overload monitoring of Ex e motors                     |                                                                                                                                                                                                                 |
| MN03402004Z PKE12 and PKE32 motor-protective circuit-breakers; overload monitoring of Ex e motors - Deutsch / English | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN03402004Z_DE_EN.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN03402004Z_DE_EN.pdf</a>                                                       |
| Schaltvermögen                                                                                                        | <a href="http://de.ecat.eaton.com/flip-cat/?edition=HPLTEv1&amp;startpage=">http://de.ecat.eaton.com/flip-cat/?edition=HPLTEv1&amp;startpage=</a>                                                               |
| Motor starters and "Special Purpose Ratings" for the North American market                                            | <a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels                                                        | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a>                                                                               |