



**Position switch, Rounded plunger, Basic device, expandable, 1 N/O, 1 NC, Screw terminal, Yellow, Insulated material, -25 - +70 °C**



**Part no.** LS-S11  
**Catalog No.** 106783  
**Alternate Catalog No.** LS-S11  
**EL-Nummer (Norway)** 4315202

## Delivery program

|  |  |    |  |
|--|--|----|--|
| Basic function                                   |  |    | Position switches<br>Safety position switches              |
| Part group reference                             |  |    | LS(M)-...  |
| Product range                                    |  |    | Rounded plunger  |
| Degree of Protection                             |  |    | IP66, IP67   |
| Features   |  |    | Basic device, expandable                                   |
| Ambient temperature                              |  | °C | -25 - +70  |
| <b>Contacts</b>                                  |  |    |  |
| N/O = Normally open                              |  |    | 1 N/O  |
| N/C = Normally closed                            |  |    | 1 NC   |
| Notes  |  |    | = safety function, by positive opening to IEC/EN 60947-5-1 |
| Contact sequence                                 |  |    |  |
| Contact travel  = Contact closed  = Contact open |  |    |  |
| Positive opening (ZW)                            |  |    | yes  |
| <b>Colour</b>                                    |  |    |  |
| Enclosure covers                                 |  |    | Yellow   |
| Enclosure covers                                 |  |    |  |
| Housing  |  |    | Insulated material   |
| Connection type                                  |  |    | Screw terminal   |

## Technical data

|                       |  |                 |  |
|-----------------------|--|-----------------|--|
| <b>General</b>        |  |                 |  |
| Standards             |  |                 | IEC/EN 60947   |
| Climatic proofing     |  |                 | Damp heat, constant, to IEC 60068-2-78; damp heat, cyclical, to IEC 60068-2-30 |
| Ambient temperature   |  | °C              | -25 - +70  |
| Mounting position     |  |                 | As required  |
| Degree of Protection  |  |                 | IP66, IP67   |
| Terminal capacities   |  | mm <sup>2</sup> |  |
| Solid                 |  | mm <sup>2</sup> | 1 x (0.5 - 2.5)  |
| Flexible with ferrule |  | mm <sup>2</sup> | 1 x (0.5 - 1.5)  |
| Repetition accuracy   |  | mm              | 0.15   |

## Contacts/switching capacity

|  |                  |                   |  |
|--|------------------|-------------------|--|
| Rated impulse withstand voltage          | U <sub>imp</sub> | V AC              | 4000   |
| Rated insulation voltage                 | U <sub>i</sub>   | V                 | 400  |
| Overvoltage category/pollution degree    |                  |                   | III/3  |
| Rated operational current                | I <sub>e</sub>   | A                 |  |
| AC-15                                    |                  |                   |  |
| 24 V                                     | I <sub>e</sub>   | A                 | 6  |
| 220 V 230 V 240 V                        | I <sub>e</sub>   | A                 | 6  |
| 380 V 400 V 415 V                        | I <sub>e</sub>   | A                 | 4  |
| DC-13                                    |                  |                   |  |
| 24 V                                     | I <sub>e</sub>   | A                 | 3  |
| 110 V                                    | I <sub>e</sub>   | A                 | 0.6  |
| 220 V                                    | I <sub>e</sub>   | A                 | 0.3  |
| Control circuit reliability              |                  |                   |  |
| at 24 V DC/5 mA                          | H <sub>F</sub>   | Fault probability | < 10 <sup>-7</sup> , < 1 fault in 10 <sup>7</sup> operations           |
| at 5 V DC/1 mA                           | H <sub>F</sub>   | Fault probability | < 5 x 10 <sup>-6</sup> , < 1 failure at 5 x 10 <sup>6</sup> operations |
| Supply frequency                         |                  | Hz                | max. 400   |
| Short-circuit rating to IEC/EN 60947-5-1 |                  |                   |  |
| max. fuse                                |                  | A gG/gL           | 6  |
| Rated conditional short-circuit current  |                  | kA                | 1  |

## Mechanical variables

|  |              |                   |        |
|--|--------------|-------------------|--------|
| Lifespan, mechanical                                       | Operations   | x 10 <sup>6</sup> | 8      |
| Contact temperature of roller head                         |              | °C                | ≤ 100  |
| Mechanical shock resistance (half-sinusoidal shock, 20 ms) |              |                   |        |
| Standard-action contact                                    |              | g                 | 25     |
| Operating frequency  | Operations/h |                   | ≤ 6000 |

## Actuation

|  |  |     |                                   |
|--|--|-----|-----------------------------------|
| Mechanical                                 |  |     |                                   |
| Actuating force at beginning/end of stroke |  | N   | 1.0/8.0                           |
| Actuating torque of rotary drives          |  | Nm  | 0.2                               |
| Max. operating speed with DIN cam          |  | m/s | 1/0.5                             |
| <b>Notes</b>                               |  |     | for angle of actuation α = 0°/30° |

## Design verification as per IEC/EN 61439

|  |                   |    |  |
|--|-------------------|----|--|
| Technical data for design verification   |                   |    |  |
| Rated operational current for specified heat dissipation   | I <sub>n</sub>    | A  | 6  |
| Heat dissipation per pole, current-dependent   | P <sub>vid</sub>  | W  | 0.17   |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub>  | W  | 0  |
| Static heat dissipation, non-current-dependent   | P <sub>vs</sub>   | W  | 0  |
| Heat dissipation capacity  | P <sub>diss</sub> | W  | 0  |
| Operating ambient temperature min.   |                   | °C | -25  |
| Operating ambient temperature max.   |                   | °C | 70   |
| IEC/EN 61439 design verification   |                   |    |  |
| 10.2 Strength of materials and parts   |                   |    |  |
| 10.2.2 Corrosion resistance  |                   |    | Meets the product standard's requirements.                         |
| 10.2.3.1 Verification of thermal stability of enclosures   |                   |    | Meets the product standard's requirements.                         |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                   |    | Meets the product standard's requirements.                         |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.                         |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                   |    | Meets the product standard's requirements.                         |
| 10.2.5 Lifting   |                   |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact   |                   |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions  |                   |    | Meets the product standard's requirements.                         |
| 10.3 Degree of protection of ASSEMBLIES  |                   |    | Does not apply, since the entire switchgear needs to be evaluated. |

|  |  |  |
|--|--|--|
| 10.4 Clearances and creepage distances                   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock                   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections        |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors                 |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties                               |  |  |
| 10.9.2 Power-frequency electric strength                 |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage                         |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise                                   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                               |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                      |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 7.0

|   |    |                    |
|---|----|--------------------|
| Sensors (EG000026) / End switch (EC000030)  |    |                    |
| Electric engineering, automation, process control engineering / Binary sensor technology, safety-related sensor technology / Position switch / Position switch (Type 1)<br>(ecI@ss10.0.1-27-27-06-01 [AGZ382015]) |    |                    |
| Width sensor  | mm | 31                 |
| Diameter sensor   | mm | 0                  |
| Height of sensor  | mm | 61                 |
| Length of sensor  | mm | 33.5               |
| Rated operation current I <sub>e</sub> at AC-15, 24 V   | A  | 6                  |
| Rated operation current I <sub>e</sub> at AC-15, 125 V  | A  | 6                  |
| Rated operation current I <sub>e</sub> at AC-15, 230 V  | A  | 6                  |
| Rated operation current I <sub>e</sub> at DC-13, 24 V   | A  | 3                  |
| Rated operation current I <sub>e</sub> at DC-13, 125 V  | A  | 0.8                |
| Rated operation current I <sub>e</sub> at DC-13, 230 V  | A  | 0.3                |
| Switching function  |    | Slow-action switch |
| Switching function latching   |    | No                 |
| Output electronic   |    | No                 |
| Forced opening  |    | Yes                |
| Number of safety auxiliary contacts   |    | 1                  |
| Number of contacts as normally closed contact   |    | 1                  |
| Number of contacts as normally open contact   |    | 1                  |
| Number of contacts as change-over contact   |    | 0                  |
| Type of interface   |    | None               |
| Type of interface for safety communication  |    | None               |
| Construction type housing   |    | Cuboid             |
| Material housing  |    | Plastic            |
| Coating housing   |    | Other              |
| Type of control element   |    | Plunger            |
| Alignment of the control element  |    | Other              |
| Type of electric connection   |    | Other              |
| With status indication  |    | No                 |
| Suitable for safety functions   |    | Yes                |
| Explosion safety category for gas   |    | None               |
| Explosion safety category for dust  |    | None               |
| Ambient temperature during operating  | °C | 25 - 70            |
| Degree of protection (IP)   |    | IP67               |
| Degree of protection (NEMA)   |    | 4X                 |


Approvals

|                             |  |   |
|-----------------------------|--|---|
| Product Standards           |  | IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14; CE marking        |
| UL File No.                 |  | E29184  |
| UL Category Control No.     |  | NKCR  |
| CSA File No.                |  | 12528   |
| CSA Class No.               |  | 3211-03   |
| North America Certification |  | UL listed, CSA certified                                    |
| Degree of Protection        |  | IEC: IP66, 67, UL/CSA Type 3R, 4X (indoor use only), 12, 13 |

Dimensions

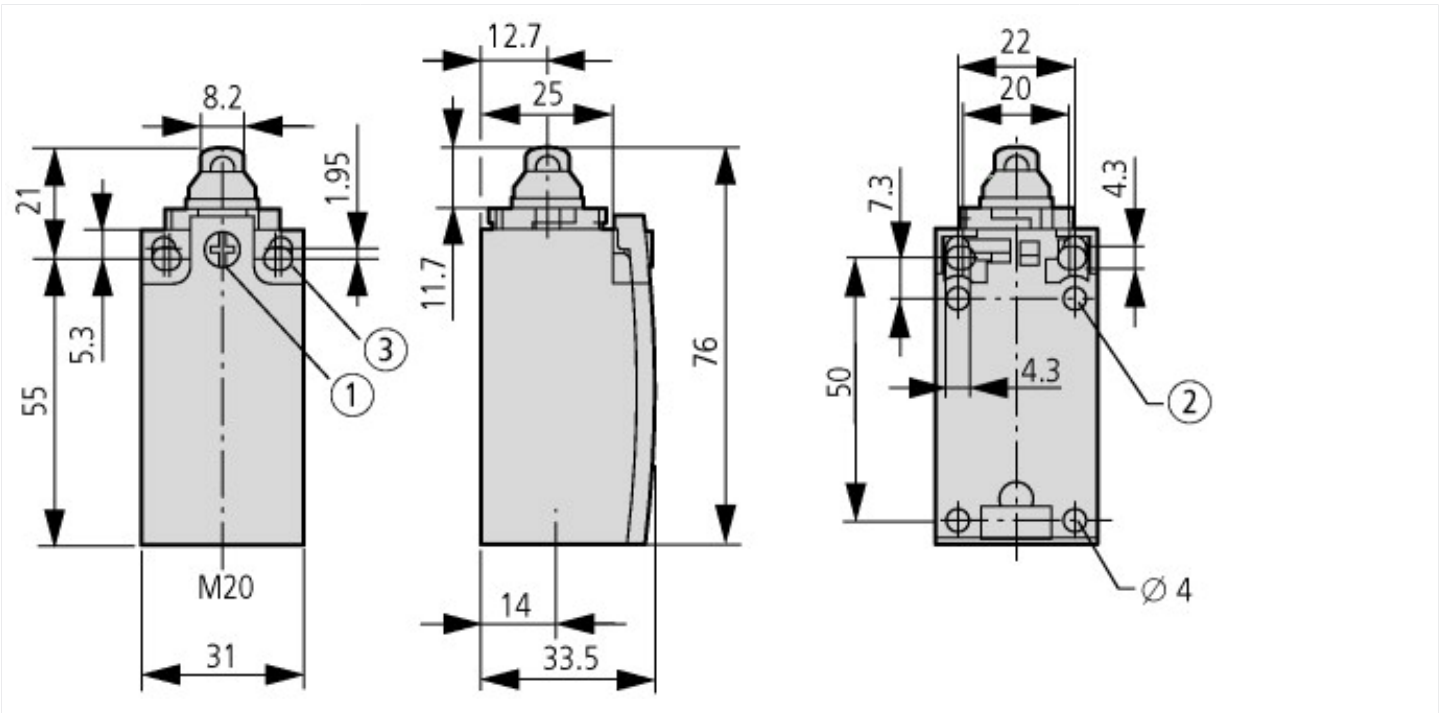

- ① Tightening torque of cover screws: 0.8 Nm ±0.2 Nm
  - ② only with LS (insulated version)
  - ③ Fixing screws 2 x M4 ≥ 30
- M<sub>A</sub> = 1.5 Nm

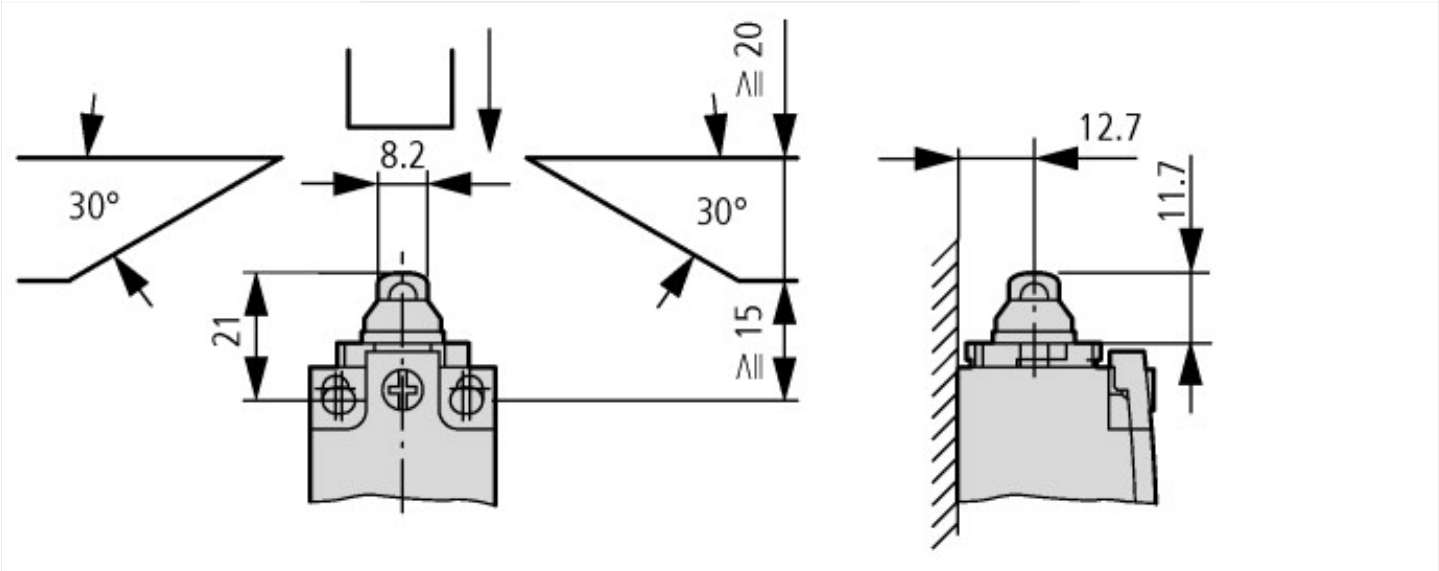

Assets (links)

- [Declaration of CE Conformity](#)  
00003068
- [Instruction Leaflets](#)  
IL053001ZU2018\_06

Additional product information (links)

IL053001ZU LS-Titan position switch: basic device

