


**Digital output module XI/ON, 24 V DC, 2DO(relays), changeover contact**
**Part no. XN-2DO-R-C0**  
**Catalog No. 140054**
**EL-Nummer (Norway) 0004520626**

## Delivery program

Function			XI/ON I/O modules
Function			XN Slice module
Short Description			2 changeover contacts, isolated 230 V AC / 30 V DC
For use with			XN-S4T-SBBS XN-S4S-SBBS

## Technical data

### General

Standards			EN 61000-6-2 EN 61000-6-4 EN 61131-2
Potential isolation			Yes, through optocoupler
Ambient temperature			
Ambient temperature, operation		°C	0 - +55
Storage, transport	8	°C	-25 - +85
Relative humidity			
Relative humidity			5 - 95 % (indoor), Level RH-2, no condensation (for storage at 45°C)
Ambient conditions, mechanical			
Degree of Protection			IP20
Harmful gases		ppm	SO <sub>2</sub> : 10 (rel. humidity < 75%, no condensation) H <sub>2</sub> S: 1.0 (rel. humidity < 75 %,no condensation)
Vibration resistance, operating conditions			according to IEC/EN 60068-2-6
Mechanical shock resistance		g	according to IEC 60068-2-27
Continuous shock resistance (IEC/EN 60068-2-29)			According to IEC 60068-2-29
Drop and topple			According to IEC 60068-2-31, free fall according to IEC 60068-2-32
Electromagnetic compatibility (EMC)			
ESD	Air/contact discharge	kV	EN 61000-4-2
Electromagnetic fields	(0.08...1) / (1,4...2) / (2...2,7) GHz	V/m	EN 61100-4-2
Burst			EN 61100-4-4
Surge			EN 61100-4-5
Radiated RFI		V	EN 61100-4-6
Emitted interference (radiated, high frequency)	(30...230 MHz) / (230...1000 MHz)	dB	EN 55016-2-3
Voltage fluctuations/voltage dips			EN 61131-2
Type test			to EN 61131-2
Approvals			CE, cULus
Other technical data (sheet catalogue)			Technical Data

### Analog input modules

Rated voltage through supply terminal	U <sub>L</sub>		24 V DC
---------------------------------------	----------------	--	---------

Rated current consumption from supply terminal	I <sub>L</sub>	mA	20
Rated current consumption from module bus	I <sub>MB</sub>	mA	≤ 28
Connectable sensors			Resistive loads Inductive loads Lamp loads
Base modules			
without C connection			4-wire XN-S4x-SBBS

### Analog output modules

Rated voltage through supply terminal	U <sub>L</sub>		24 V DC
Rated current consumption from supply terminal	I <sub>L</sub>	mA	20
Rated current consumption from module bus	I <sub>MB</sub>	mA	≤ 28
Base modules			
without C connection			4-wire XN-S4x-SBBS

### Digital outputs

Rated voltage through supply terminal	U <sub>L</sub>		24 V DC
Rated current consumption from the supply terminal (at load current = 0 mA)	I <sub>L</sub>	mA	20
Rated current consumption from module bus	I <sub>MB</sub>	mA	≤ 28
Power loss	P	W	Normally 1
Can be connected			Resistive loads Inductive loads Lamp loads

### Digital inputs

Rated voltage through supply terminal	U <sub>L</sub>		24 V DC
Rated current consumption from supply terminal	I <sub>L</sub>	mA	20
Rated current consumption from module bus	I <sub>MB</sub>	mA	≤ 28
Rated insulation voltage	U <sub>i</sub>	V AC	1780
Base modules			
without C connection			4-wire XN-S4x-SBBS

### Relay modules

Contact type art			2 Changeover contact
Rated voltage through supply terminal	U <sub>L</sub>		24 V DC
Rated current consumption from supply terminal	I <sub>L</sub>	mA	20
Rated current consumption from module bus	I <sub>MB</sub>	mA	≤ 28
Rated insulation voltage	U <sub>i</sub>	V AC	1500, 500
Power loss	P	W	Normally 1
Can be connected			Resistive loads Inductive loads Lamp loads
Rated load voltage			230 V AC, 30 V DC
Output current per channel/230 V AC			
Maximum continuous current		mA	2000
Maximum continuous current, resistive load			5 A
Minimum load current		mA	100 mA at 12 V DC
Utilization factor	g	%	100
Lifespan at 230 V AC		Switching operations	
at 5 A	Operations	x 10 <sup>6</sup>	0.1
at 0.5 A	Operations	x 10 <sup>6</sup>	1
Base modules			
without C connection			4-wire XN-S4x-SBBS

### Power supply module

Rated voltage through supply terminal	U <sub>L</sub>		24 V DC
Rated current consumption from supply terminal	I <sub>L</sub>	mA	20
Rated current consumption from module bus	I <sub>MB</sub>	mA	≤ 28
Power loss	P	W	1

Counter module

Rated voltage through supply terminal	U <sub>L</sub>		24 V DC
Rated current consumption from supply terminal	I <sub>L</sub>	mA	20
Rated current consumption from module bus	I <sub>MB</sub>	mA	≤ 28

Interfaces

Rated voltage through supply terminal	U <sub>L</sub>		24 V DC
Rated current consumption from supply terminal	I <sub>L</sub>	mA	20
Rated current consumption from module bus	I <sub>MB</sub>	mA	≤ 28
Power loss	P	W	Normally 1

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I <sub>n</sub>	A	0
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	0
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	1
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	0
Operating ambient temperature max.		°C	55
Degree of Protection			IP20
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Meets the product standard's requirements.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

PLC's (EG000024) / Fieldbus, decentr. periphery - digital I/O module (EC001599)			
Electric engineering, automation, process control engineering / Control / Field bus, decentralized peripheral / Field bus, decentralized peripheral - digital I/O module (ecI@ss10.0.1-27-24-26-04 [BAA055014])			
Supply voltage AC 50 Hz		V	0 - 0
Supply voltage AC 60 Hz		V	0 - 0
Supply voltage DC		V	18 - 30
Voltage type of supply voltage			DC


Number of digital inputs		0
Number of digital outputs		2
Digital inputs configurable		No
Digital outputs configurable		No
Input current at signal 1	mA	0
Permitted voltage at input	V	0 - 0
Type of voltage (input voltage)		AC/DC
Type of digital output		Relay
Output current	A	5
Permitted voltage at output	V	0 - 0
Type of output voltage		AC/DC
Short-circuit protection, outputs available		No
Number of HW-interfaces industrial Ethernet		0
Number of interfaces PROFINET		0
Number of HW-interfaces RS-232		0
Number of HW-interfaces RS-422		0
Number of HW-interfaces RS-485		0
Number of HW-interfaces serial TTY		0
Number of HW-interfaces parallel		0
Number of HW-interfaces Wireless		0
Number of HW-interfaces USB		0
Number of HW-interfaces other		1
With optical interface		No
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		Yes
Supporting protocol for CAN		Yes
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for KNX		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		Yes
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		Yes
Radio standard Bluetooth		No
Radio standard WLAN 802.11		No
Radio standard GPRS		No
Radio standard GSM		No
Radio standard UMTS		No
IO link master		No
System accessory		Yes
Degree of protection (IP)		IP20
Type of electric connection		Plug-in connection
Time delay at signal exchange	ms	0 - 0

Fieldbus connection over separate bus coupler possible			Yes
Rail mounting possible			Yes
Wall mounting/direct mounting			No
Front build in possible			No
Rack-assembly possible			No
Suitable for safety functions			No
Category according to EN 954-1			None
SIL according to IEC 61508			None
Performance level acc. EN ISO 13849-1			None
Appendant operation agent (Ex ia)			No
Appendant operation agent (Ex ib)			No
Explosion safety category for gas			None
Explosion safety category for dust			None
Width		mm	12.6
Height		mm	74.1
Depth		mm	55.4

## Approvals

Product Standards			UL 508; CSA-C22.2 No. 142; IEC/EN 6113-2; CE marking
UL File No.			E205091
UL Category Control No.			NRAQ, NRAQ7
CSA File No.			UL report applies to both US and Canada
CSA Class No.			2252-01, 2252-81
North America Certification			UL recognized, certified by UL for use in Canada
Specially designed for North America			No
Current Limiting Circuit-Breaker			No
Degree of Protection			IEC: IP20, UL/CSA Type: -

## Dimensions

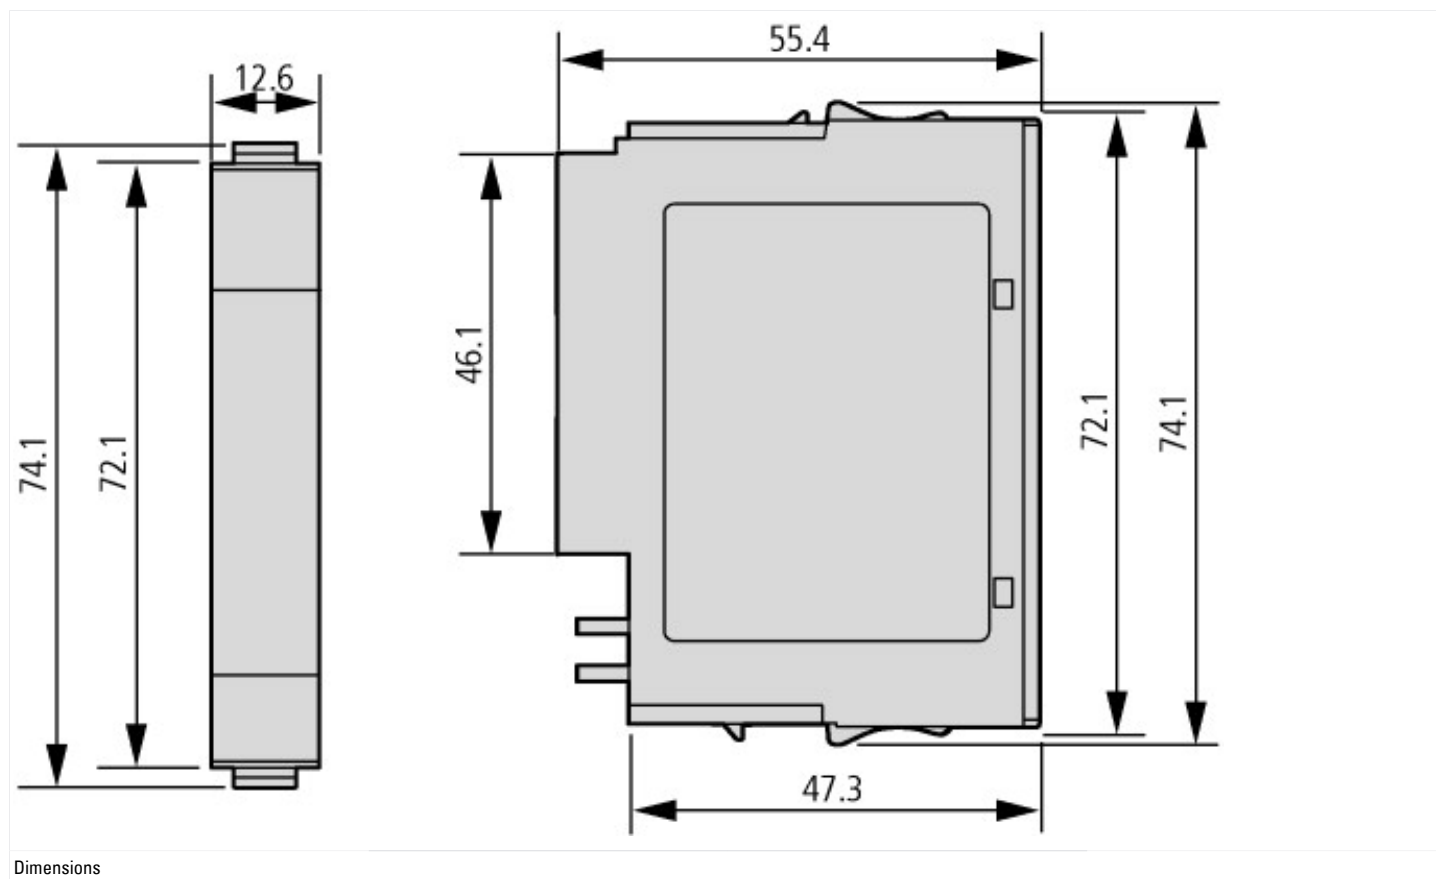

Dimensions

## Additional product information (links)

Manual Digital XI/ON modules, power supply module MN05002010Z

Benutzerhandbuch XI/ON-Module, Stromversorgungsmodul MN05002010Z - Deutsch	<a href="https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN05002010Z_DE.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN05002010Z_DE.pdf</a>
Manual Digital XI/ON modules, power supply module MN05002010Z - English	<a href="https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN05002010Z_EN.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN05002010Z_EN.pdf</a>
Technical Data	<a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=14.111">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=14.111</a>