



Connection, asi, of RMQ22, for surface mounting enclosure

Part no. RMQ-M1C-ASI
Catalog No. 032314
Alternate Catalog No. RMQ-M1C-ASIQ
EL-Nummer (Norway) 4521521

Delivery program

Product range		Accessories
Accessories		AS-Interface
Basic function accessories		AS-Interface connection
Fixing		Front fixing for RMQ-Titan
		External connections: 4 inputs/4 outputs For contact and lamp socket elements. RMQ-Titan surface mounting enclosures: M22-I3, M22-I4, M22-I6
Connection to SmartWire-DT		no

Technical data

General

Standards		EN 50081-1 EN 50082-1
Radio interference suppression		EN 55011, EN 55022
Limit value class		A
Degree of Protection		IP20
Climatic proofing		Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature		
Open	°C	-25 - +55
Mechanical shock resistance	g	> 30 Shock duration 11 ms
Vibration to IEC 60068-2-27 (amplitude 1 mm)	Hz	10 55
Dimensions	mm	92 x 46 x 30
Weight	kg	0.1
Fixing		Front fixing for RMQ-Titan
Mounting position		As required

Power supply

Rated voltage to AS-Interface Specification	V DC	26.5 - 31.6
Power supply		Completely from the AS-Interface cable
Addressing		Via connection to AS-Interface cable
AS-Interface		Protected against polarity reversal
Rated operational current at full load	mA	120
Rated operational current when idle (no I, O set)	mA	30
Status LEDs		AS-Interface voltage: green LED

Inputs

Voltage range	V DC	24 - 30
Rated current per input	mA	3.5
High signal level	V	≥ 15
Length of connecting cables	cm	200

Outputs

Outputs, protected against short-circuit	Number	4
Voltage range	V DC	24 V DC (+10/-15%)
Max. current carrying capacity		
Σ 3 external outputs		60
Length of connecting cables	cm	200
Profile		S-7.0

Specification		2.0
Addresses	Number	31


Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	0
Heat dissipation per pole, current-dependent	P_{vid}	W	0
Equipment heat dissipation, current-dependent	P_{vid}	W	0
Static heat dissipation, non-current-dependent	P_{vs}	W	1.5
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Please enquire
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Accessories for control circuit devices (EC002024)			
Type of electrical accessory			Other
Type of mechanical accessory			Other

Dimensions

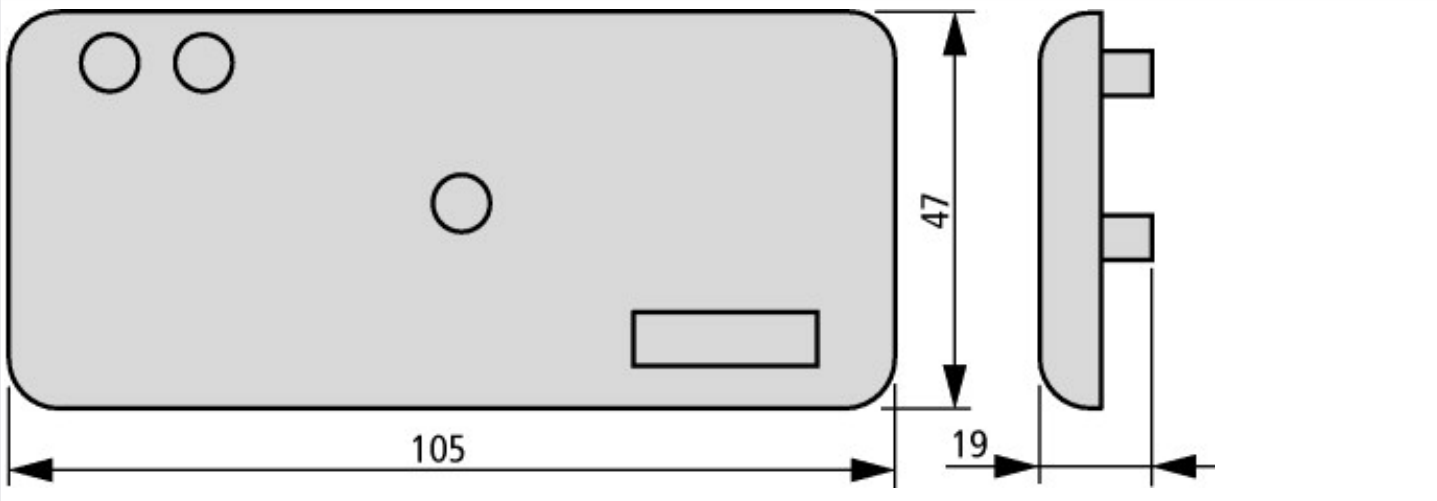

Assets (links)

Declaration of CE Conformity
00002898

Instruction Leaflets
IL04716018Z2018_05

Additional product information (links)

IL04716018Z (AWA1160-1541) AS Interface connection for RMQ	
IL04716018Z (AWA1160-1541) AS Interface connection for RMQ	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716018Z2018_05.pdf