



Product range		Accessories
Basic function		Cable operation kit
		Equipment supplied: 1 cable eye bolt 2 Guide pulley 4 cable clamps, incl. screws 10 m steel cable (plastic-sheathed) 1 Counterweight

The function is defined by moving the pivot point or flipping the lever arm at the installation location:

Pump dry:

Pivot point on left (state of delivery

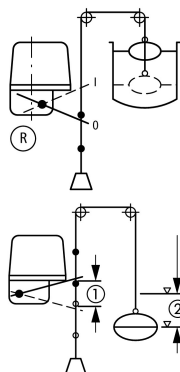

① Stroke

② Level difference


① Stroke ② Level difference

The actuation force is produced by the float weight and the counterweight and is transmitted to the switching lever via the cable clamps attached to the wire rope.

Technical data for design verification			
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70

Low-voltage industrial components (EG000017) / Accessories for control circuit devices (EC002024)		
Type of electrical accessory		Other
Type of mechanical accessory		Other

Dimensions

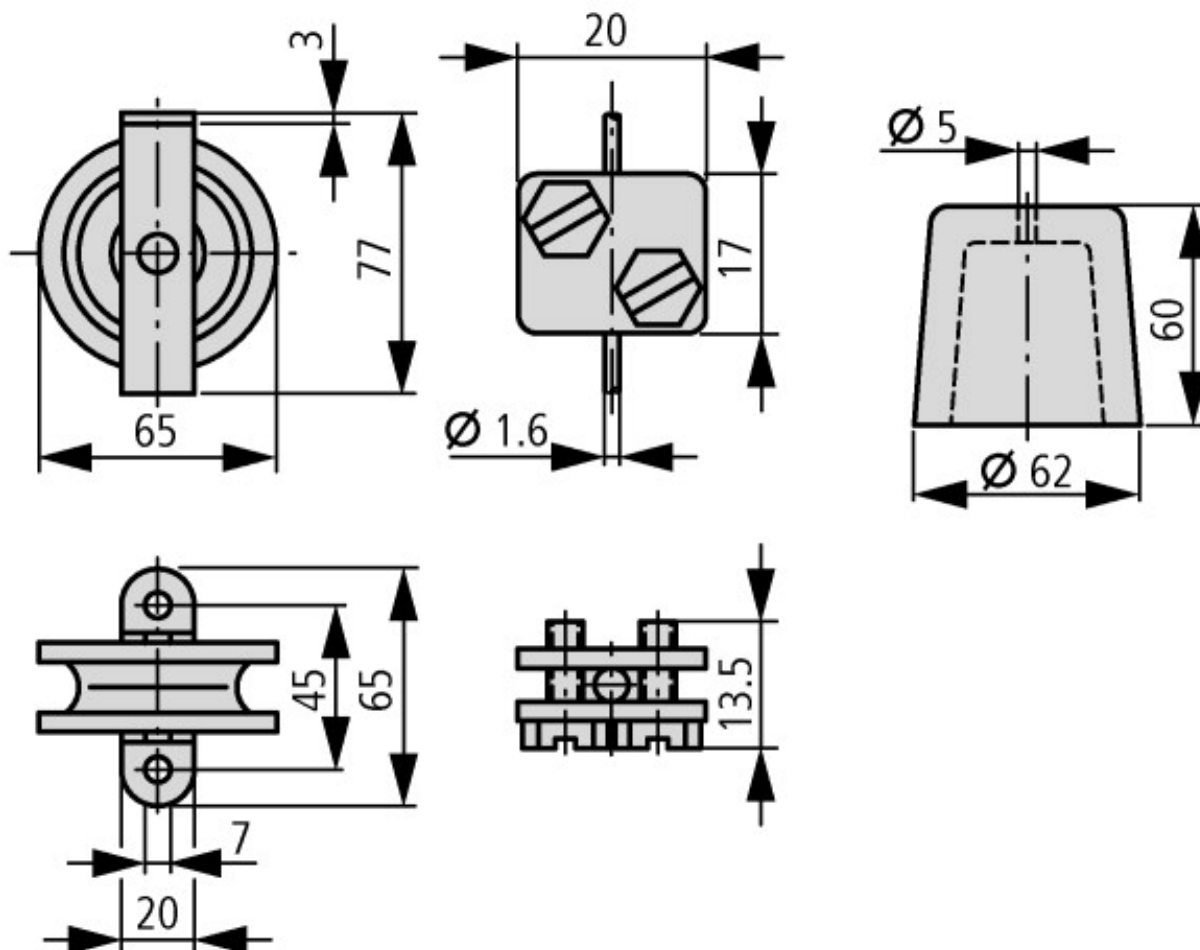

Cable operation:
Left: guide pulley
Centre: cable clamp
Right: 0.9 kg counterweight

Assets (links)

[Declaration of CE Conformity](#)

00002785