

**AS-i branch M12**

Part no. ZB2-100-AZ1
Catalog No. 082667
Alternate Catalog No. ZB2-100-AZ1
EL-Nummer (Norway) 0004521555

Delivery program

Product range			AS-Interface connection and sensors
Subrange			AS-Interface link
Basic function			M12 connection socket for AS-Interface connection cable
Description			IDC termination
For use with			
For use with			RAMO RASP

Technical data**General**

Degree of Protection			IP67
Ambient temperature, storage		°C	- -40 - 85
Weight		kg	0.04


Design verification as per IEC/EN 61439

Technical data for design verification			
Operating ambient temperature min.		°C	0
Operating ambient temperature max.		°C	70

Technical data ETIM 7.0

Sensors (EG000026) / Sensor actuator adapter (EC002925)			
Electric engineering, automation, process control engineering / Connector system / Industry connector / Sensor actuator adapter (ecl@ss10.0.1-27-44-01-06 [AFR417003])			
Model			T-adapter
Contact type			Female
Screened			No
Number of poles			2
Material housing			Metal/plastic
Ambient temperature		°C	0 - 85
Operation temperature		°C	0 - 50
Degree of protection (IP), mounted			IP67
Material thread ring			Stainless steel
Rated voltage		V	24
Rated current In		A	1
Inflammability class of insulation material acc. with UL94			Other
Pollution degree			3
Material of contact surface			Other

Dimensions

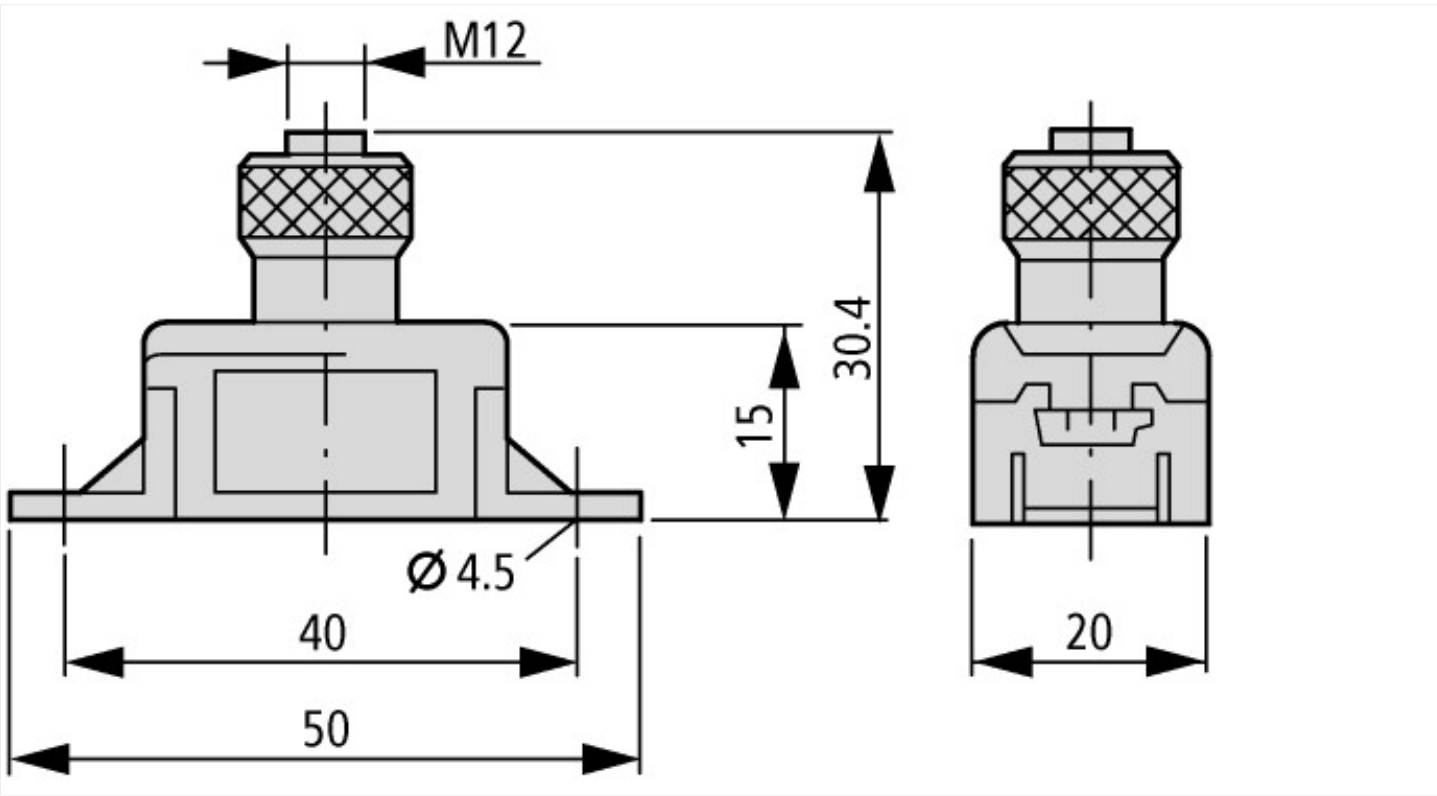

Additional product information (links)

IL03406020Z Rapid Link: Speed Control Unit	
IL03406020Z Rapid Link: Speed Control Unit	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03406020Z2018_05.pdf
IL03406019Z Rapid Link: Motor Control Unit	
IL03406019Z Rapid Link: Motor Control Unit	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03406019Z2018_04.pdf
MN03406003Z Rapid Link 4.0	
MN03406003Z Rapid Link 4.0 - Deutsch	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN03406003Z_DE.pdf
MN03406003Z Rapid Link 4.0 - English	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN03406003Z_EN.pdf
MN03406003Z Rapid Link 4.0 - français	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN03406003Z_FR.pdf