



Fuse-link, D01, 13A, 400 V, gL/gG

Part no. Z-D01/SE-13
Catalog No. 288938

Delivery program

Product range			Fuse material
Basic function			Accessories
Basic function			Fuse links
Utilization category			Utilization category gG (gL)
			Snap-fit on DIN rail in a plastic box in the colour of the indicator
Rated uninterrupted current	I_u	A	13
Fuse cartridge		Size	D01

Technical data

General

Standards			DIN VDE 0636, DIN 49522
-----------	--	--	----------------------------

Electrical

Rated operational voltage	U_e	V	
Rated operating voltage	U_e	V AC	400
		V DC	220
Rated uninterrupted current	I_u	A	13


Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	13
Heat dissipation per pole, current-dependent	P_{vid}	W	0
Equipment heat dissipation, current-dependent	P_{vid}	W	1.9
Static heat dissipation, non-current-dependent	P_{vs}	W	0
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
			0


Technical data ETIM 7.0

Circuit breakers and fuses (EG000020) / D0-system fuse link (EC001642)			
Electric engineering, automation, process control engineering / Electrical installation, device / Safety fuse systems / Neozed fuse link (ecl@ss10.0.1-27-14-21-19 [ACN353011])			
Construction size			D01
Rated current		A	13
Rated voltage		V	400
Colour code			Black
Utilization category			gL/gG (cable protection/equipment protection)

Characteristics

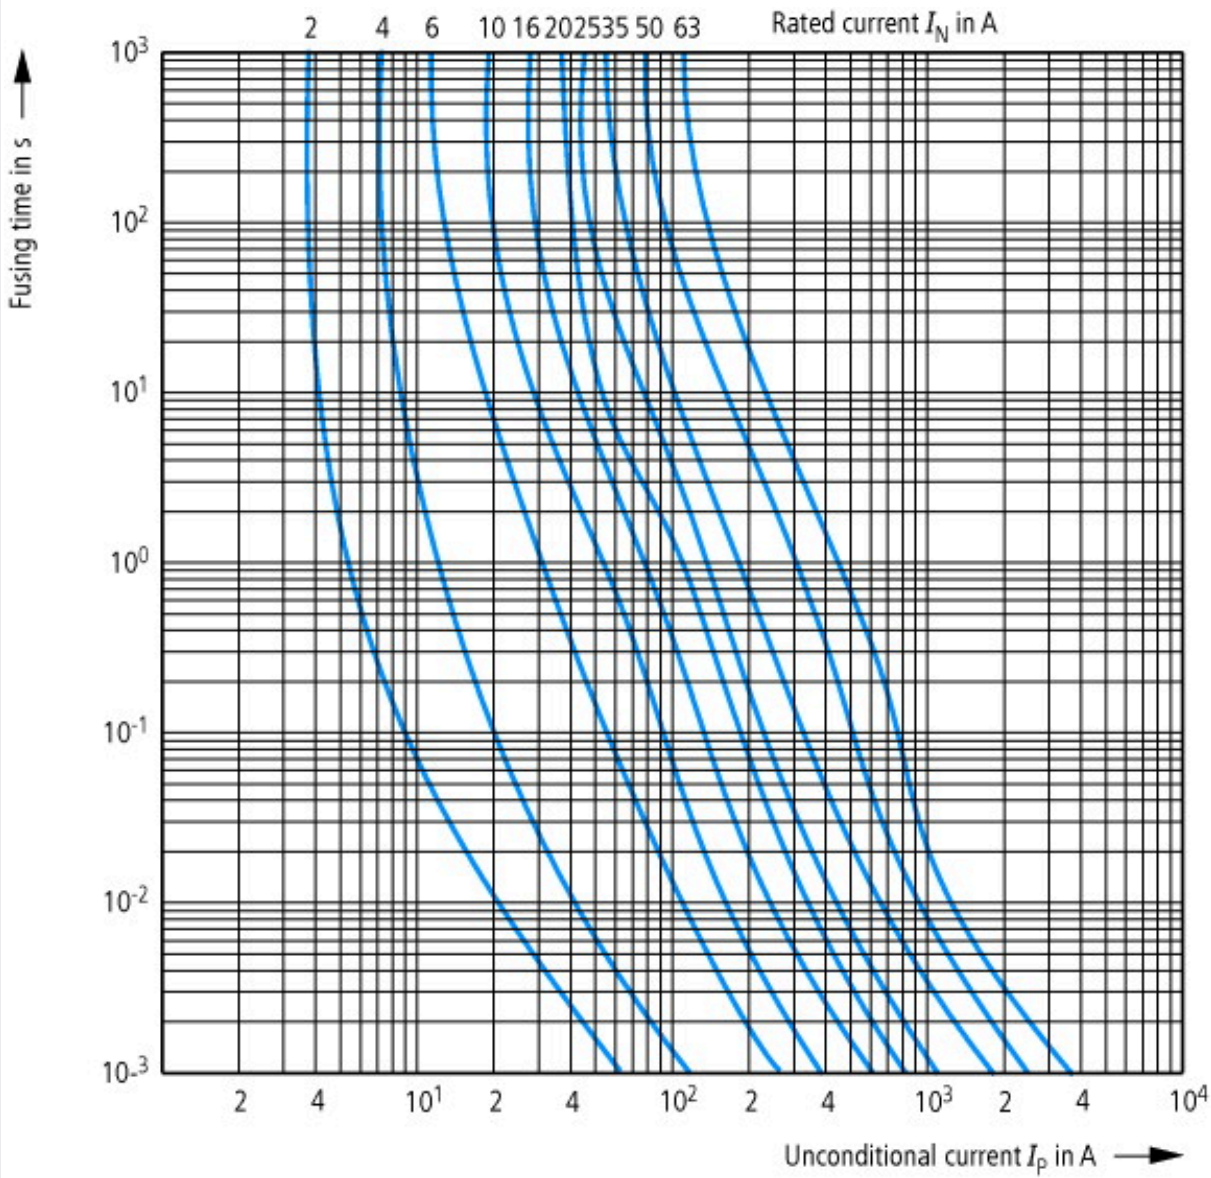

Let-through current characteristic curve

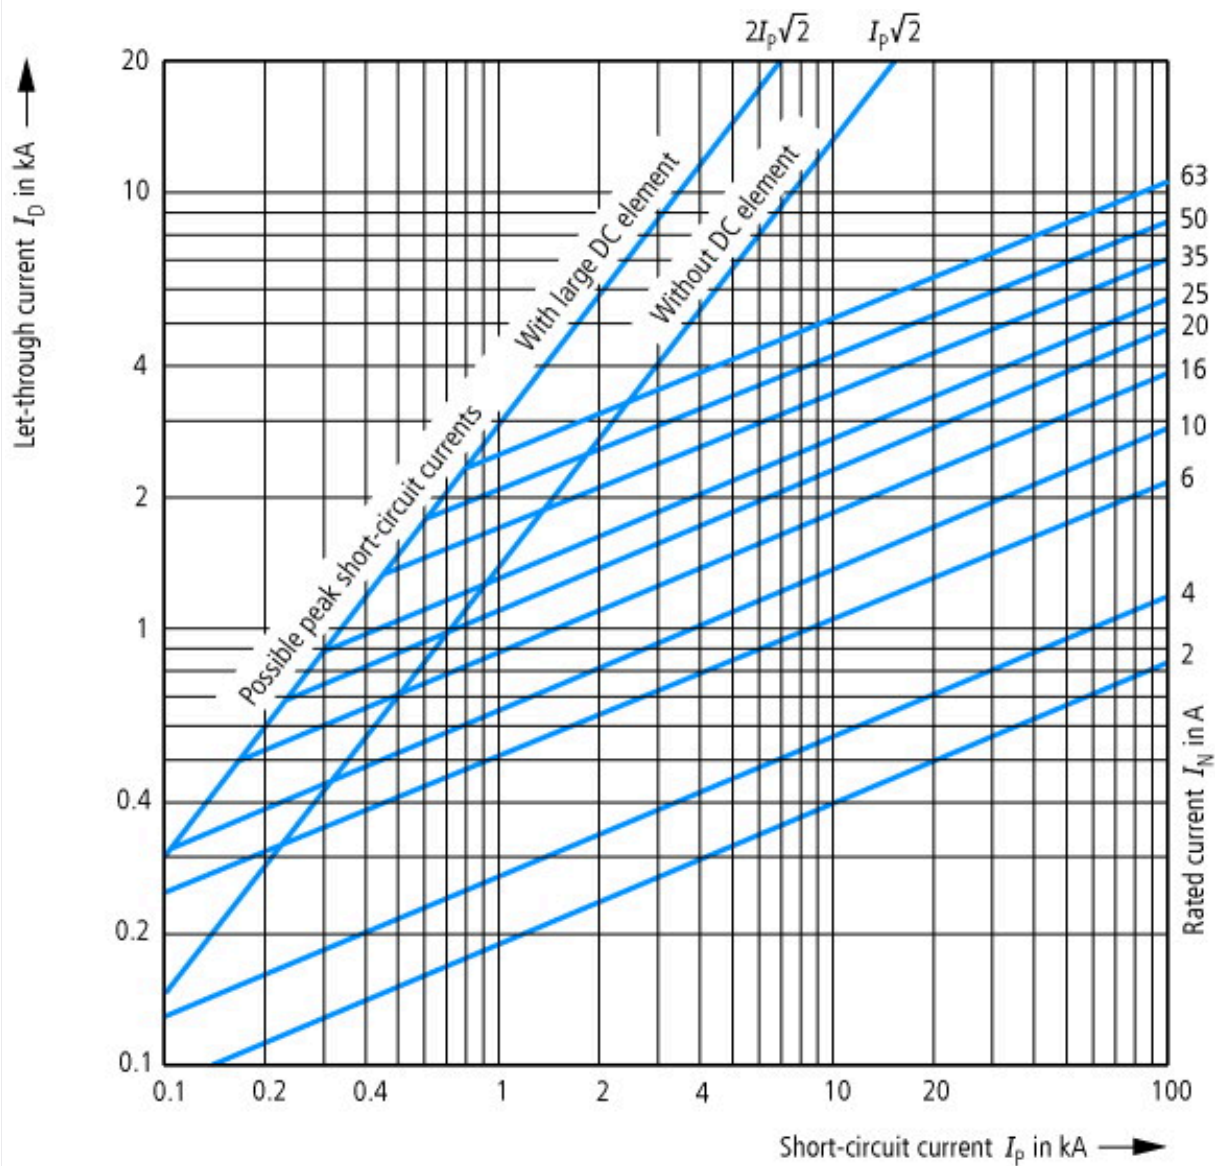

Let-through current characteristic curve